

Optix 10 Soft Close Sliding Door

Manufactured to: BS EN 14428


IMPORTANT

BEFORE STARTING THE INSTALLATION ENSURE ALL THE DOOR SIZE MEASUREMENTS CORRESPOND WITH THE INSTALLATION AREA INCLUDING THE FINISHED TILED/PANELLED WALLS. RETURNS DUE TO INCORRECT SIZING WILL NOT BE ACCEPTED.




OXSLxC1200 74Kgs
OXSLxC1400 84Kgs
OXSLxC1500 89Kgs
OXSLxC1700 99Kgs



OXSLSPxC0800 44Kgs
OXSLSPxC0900 49Kgs

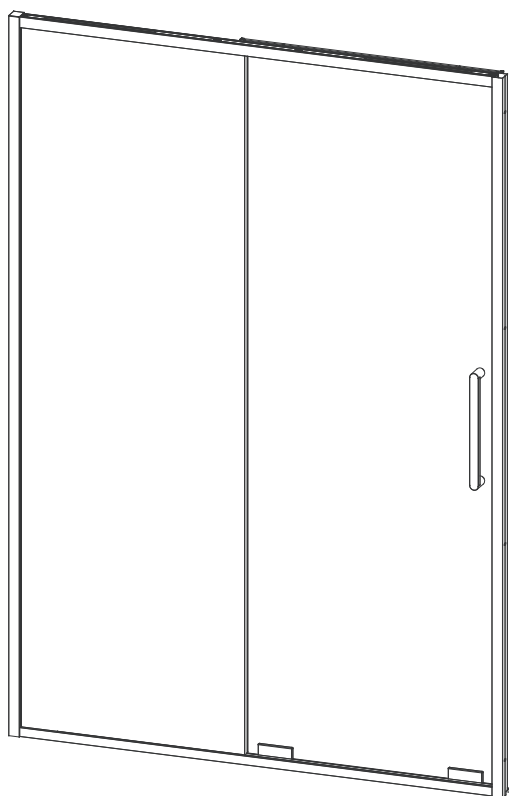

Optix 10 Soft Close Sliding Door

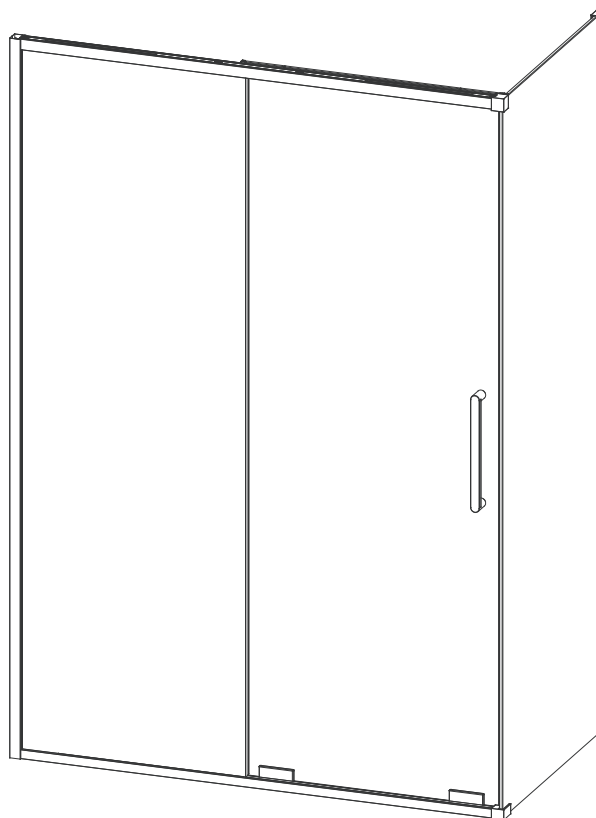

Optix 10 Side Panel for Slider

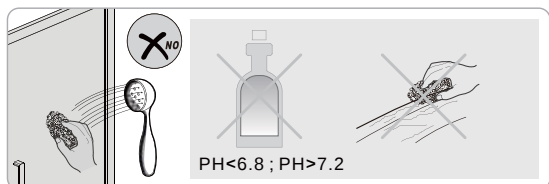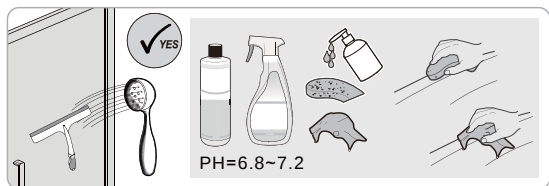

INSTALLATION INSTRUCTIONS

crosswater[®]
SHOWERING

IMPORTANT - Please read before installation

Please read these instructions carefully before starting installation and keep in a safe place for future reference.

Check the contents of the pack carefully before installation. Crosswater will not be held responsible for any de-fit / re-fit costs where faulty product has been fitted.

If any fault is found with materials or workmanship, it must be reported immediately to the manufacturer. Remedial action will be taken, based on information received, on condition that:


1. Full details are supplied to the manufacturer;
2. The enclosure has not been modified or tampered with;
3. The manufacturer is informed of any damage/shortages prior to installation.

We do not accept responsibility for any problems that may occur through incorrect installation.

The success of the installation and operation of any shower enclosure is, of course, dependant on the squareness, alignment and construction of the walls to which fixing is to be carried out.

VERY IMPORTANT

You must complete all tiling and grouting, and the shower tray **MUST** be level and fully sealed to the tiles before installation. If you do not fit the enclosure onto a tiled surface, or seal the tiles to the tray before installation, water may soak into the wall behind the wall profiles.

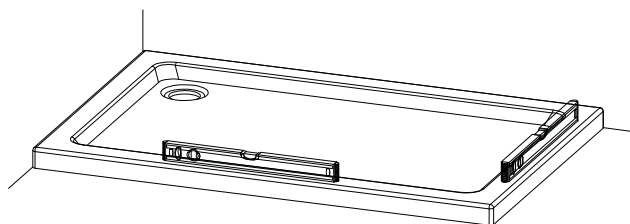

INSTALLATION - Advise and safety

The installation instructions are based on typical use and conditions.

All doors are designed to open outwards only.

These hints have been prepared for your guidance, you must exercise due care at all times.

For Health and Safety 2 people must carry out the installation of this enclosure.

Handle glass with care. Although the glass supplied is toughened safety glass (**EN12150**), impacts can damage both the glass and the frame.

Warning!

Please check for any hidden pipes or cables before drilling holes in the wall.

When using power tools always follow the manufacturers user instructions.

If the Framework is sealed to the tray on the inside, any water that may get into the framework will not be able to drain back into the tray, this may cause the enclosure to leak.

Leave the silicone sealant to dry for 24 hours before using the enclosure.


CARE AND CLEANING

Do not use solvents or abrasive material or chemicals to clean the enclosure.


Only clean using soapy water and soft cloth, rinse thoroughly afterwards.

INSTALLATION - Left and Right hand


This product is reversible for left or right hand opening. Please follow the diagram, and detail below for your choice of installation.

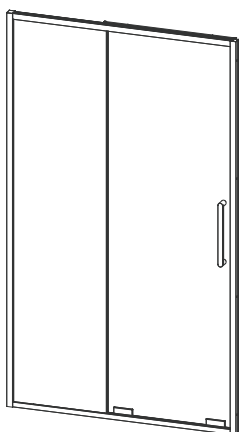


LH

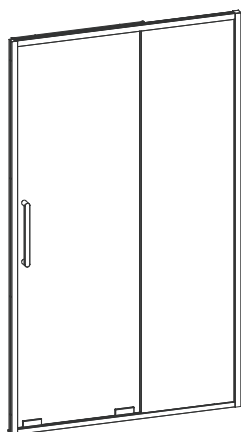

RH

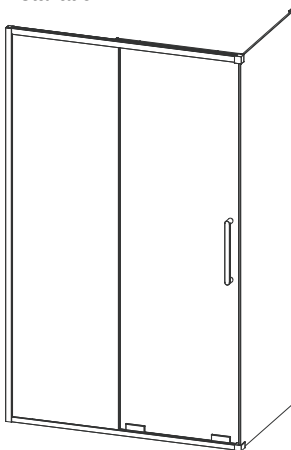


LH

























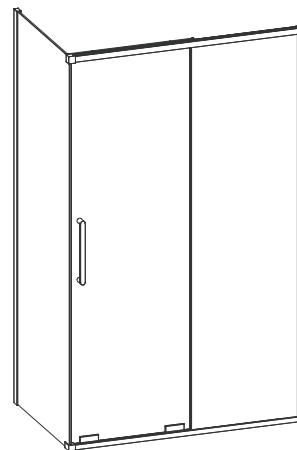


RH






Optix 10 Soft Close Sliding Door

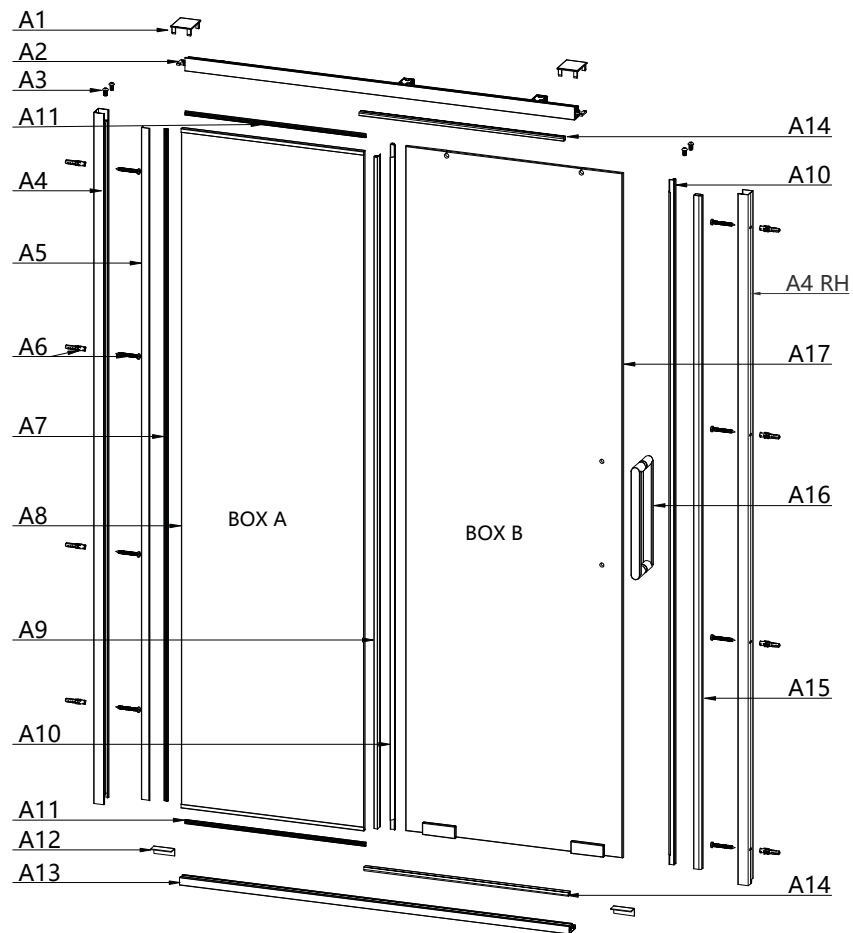



Optix 10 Side Panel for Slider

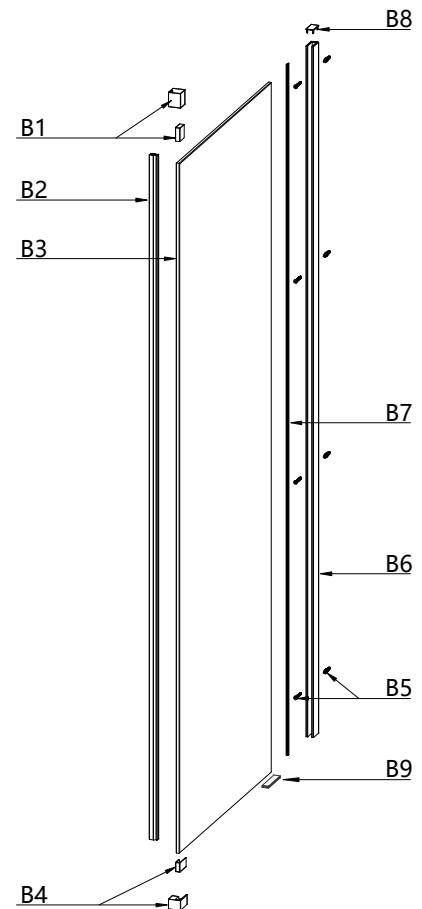



Installation tool

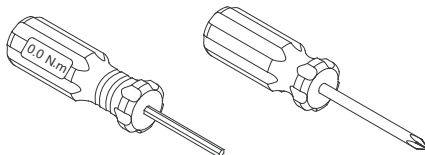






Torque screwdriver




Ø 6.5




Step A1

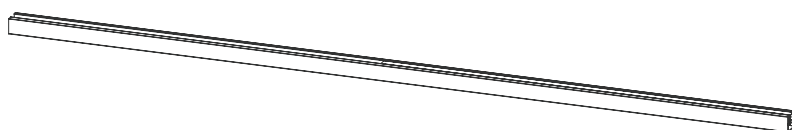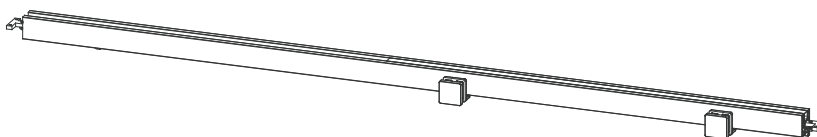


Step A2

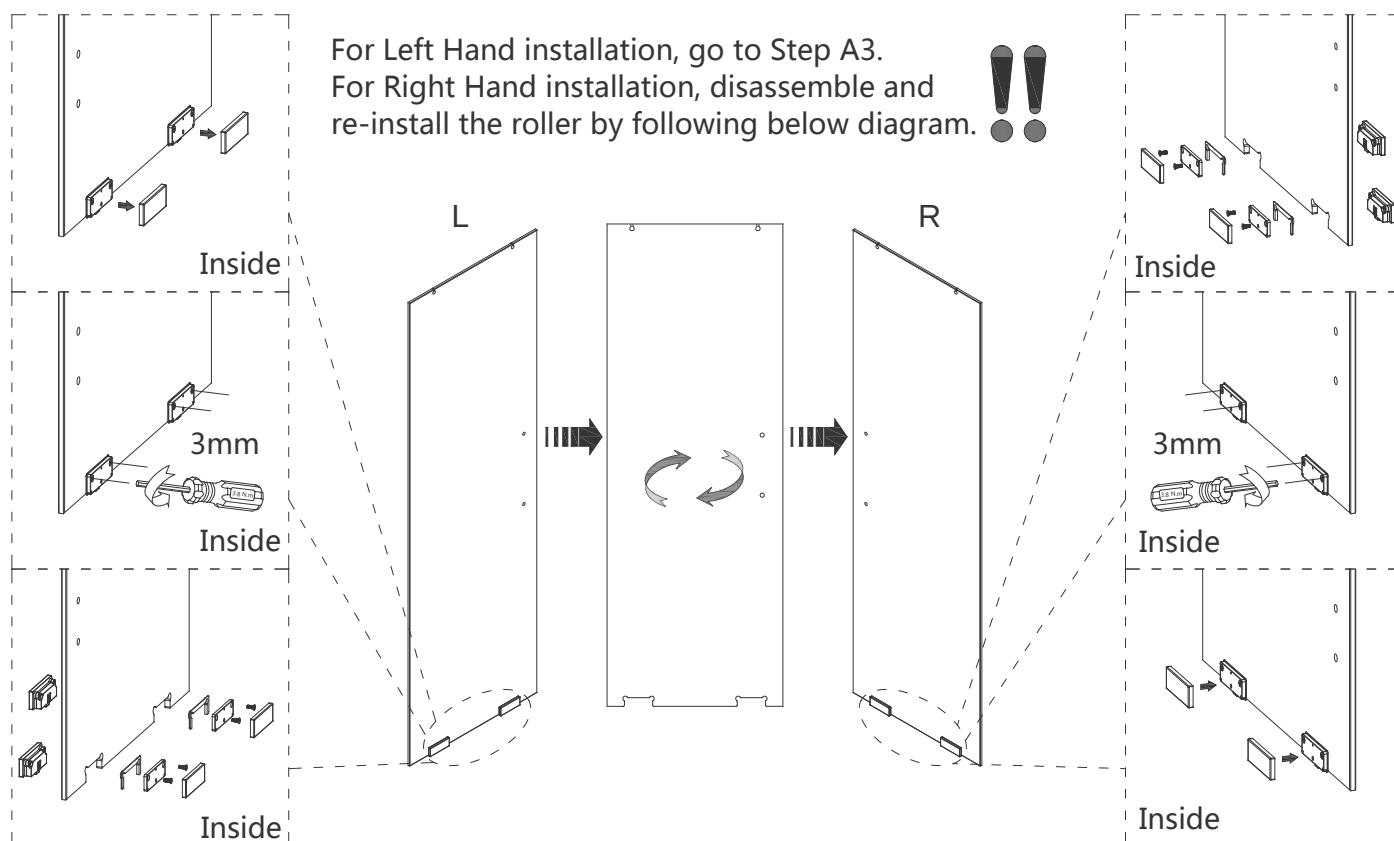


Step A3

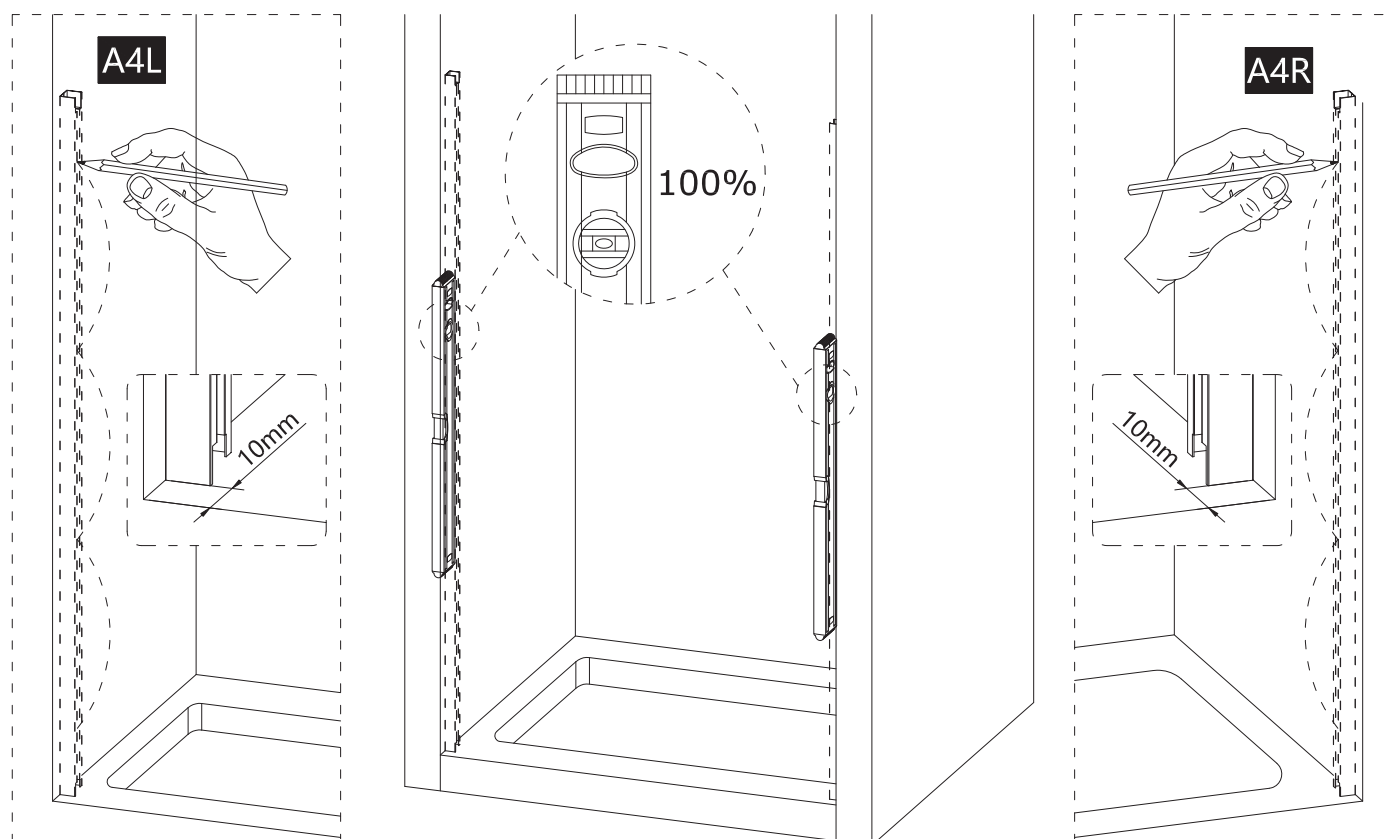


Step A4

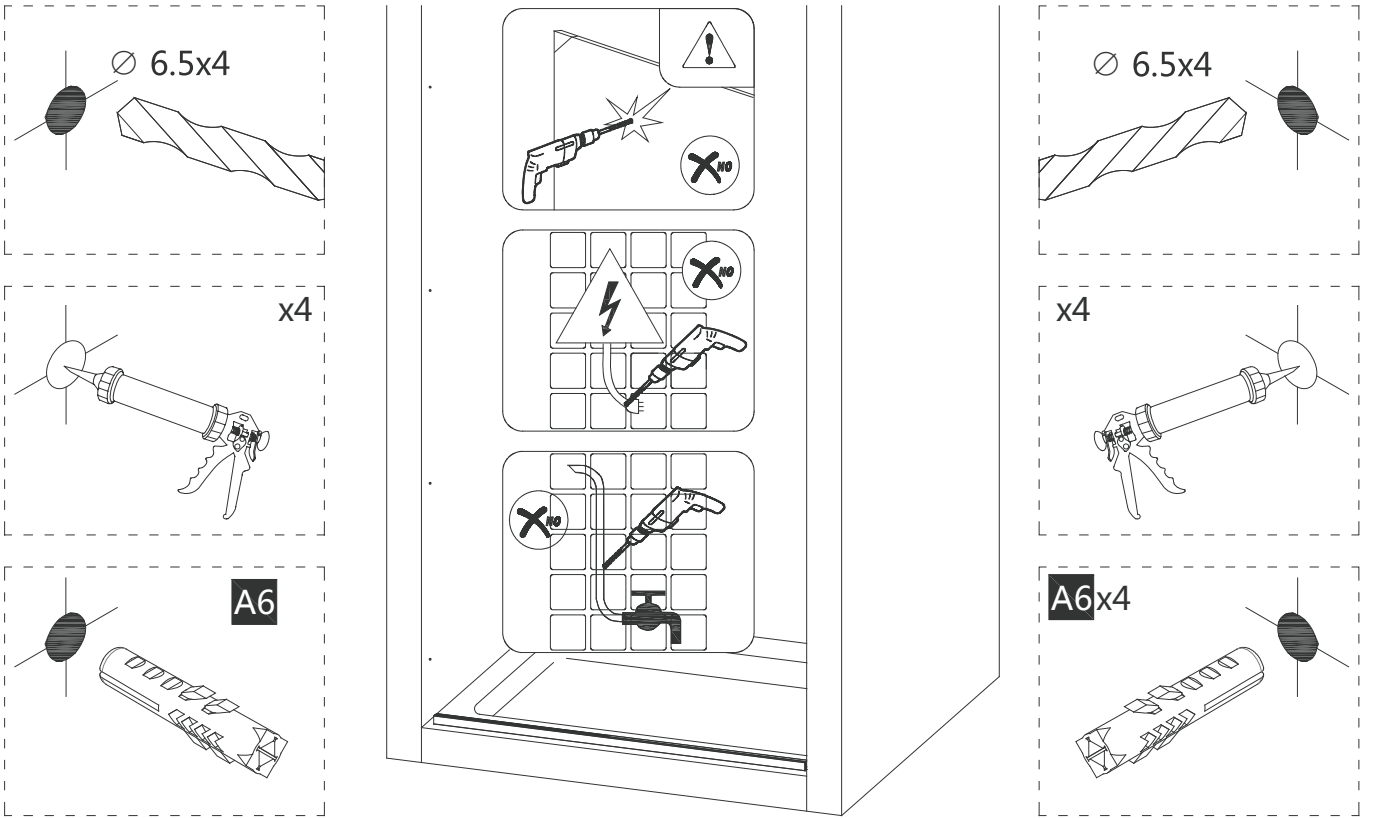





Step A6

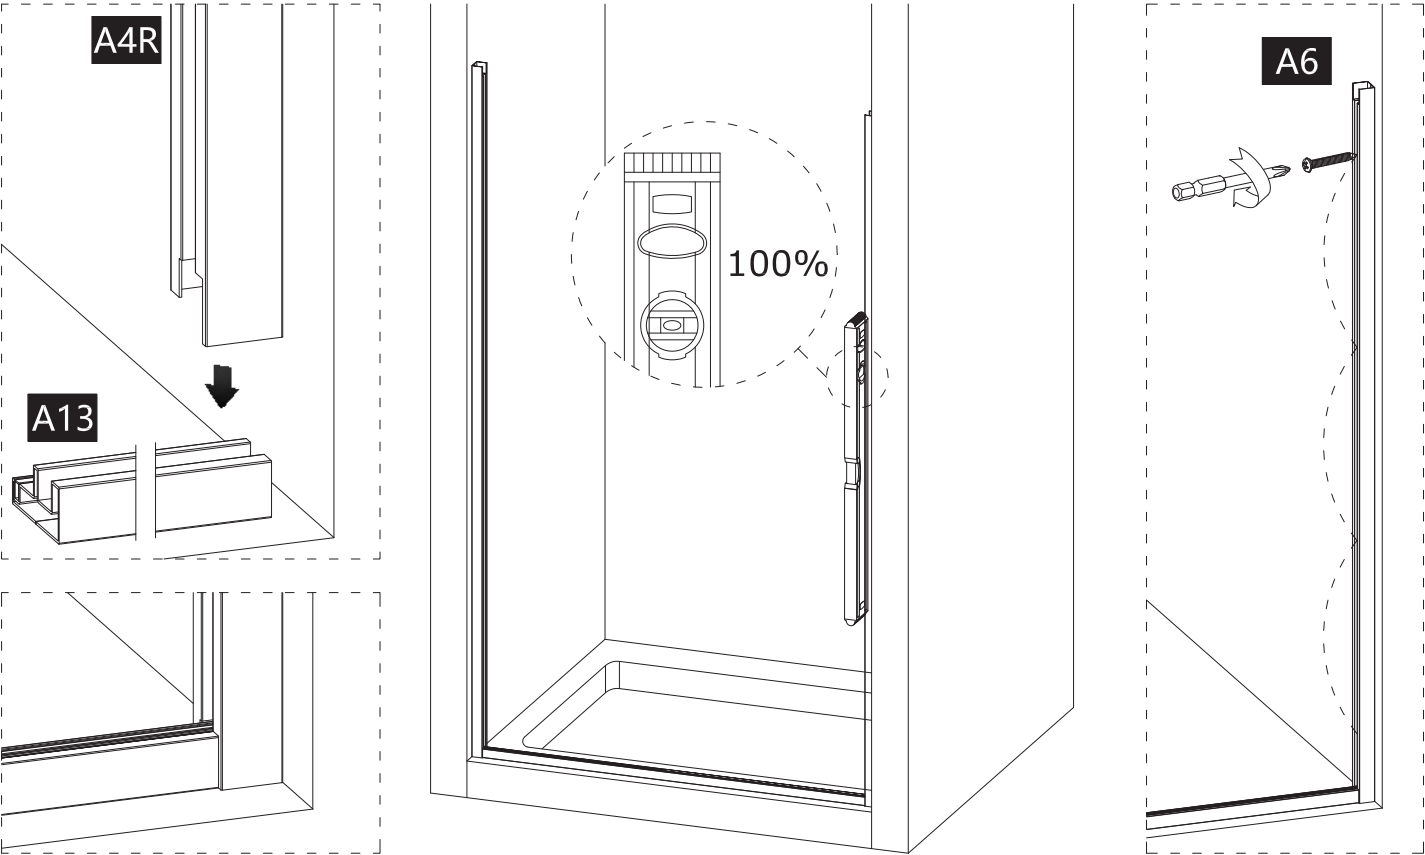



Step A7

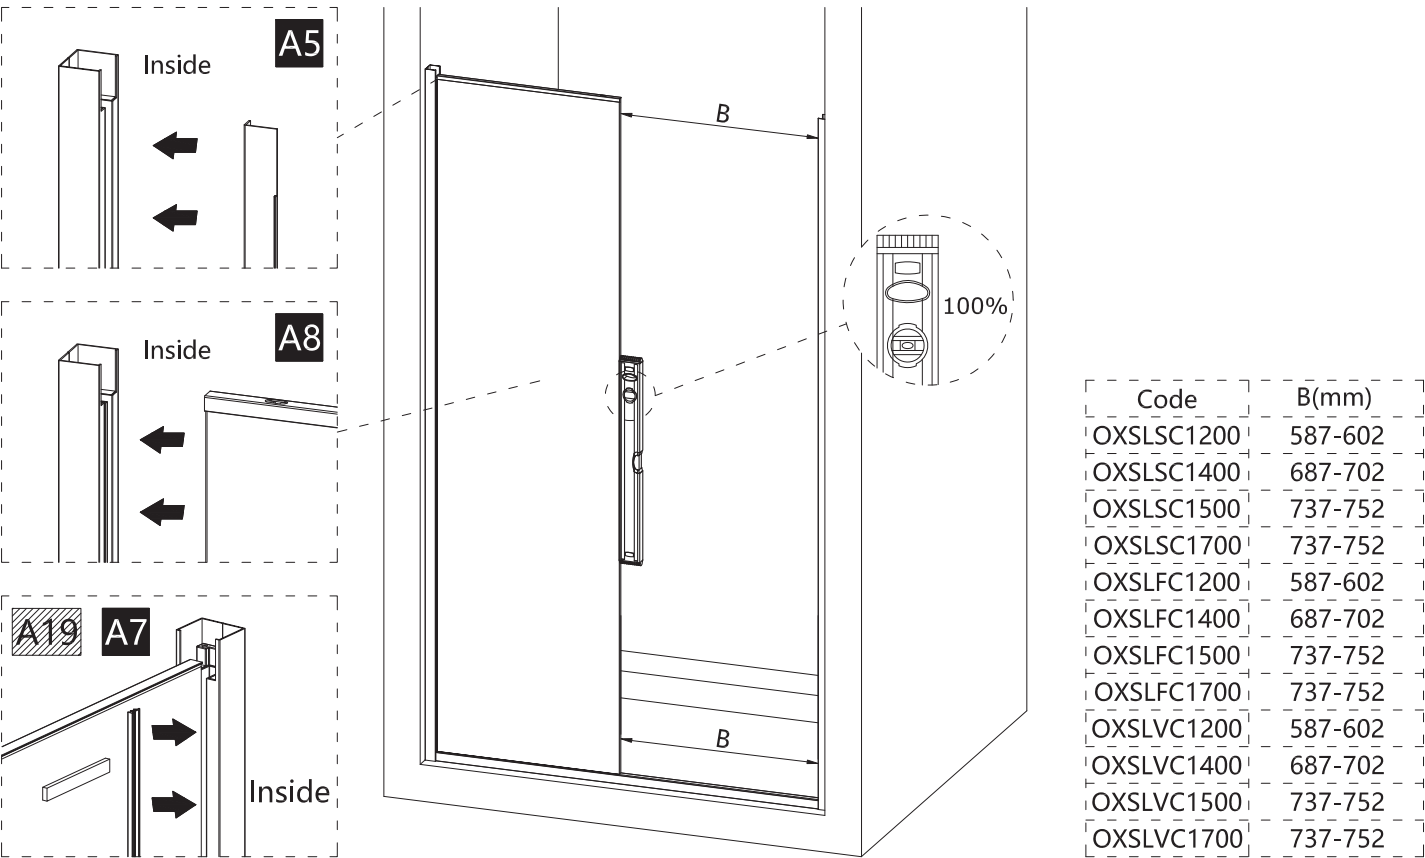




Step A8

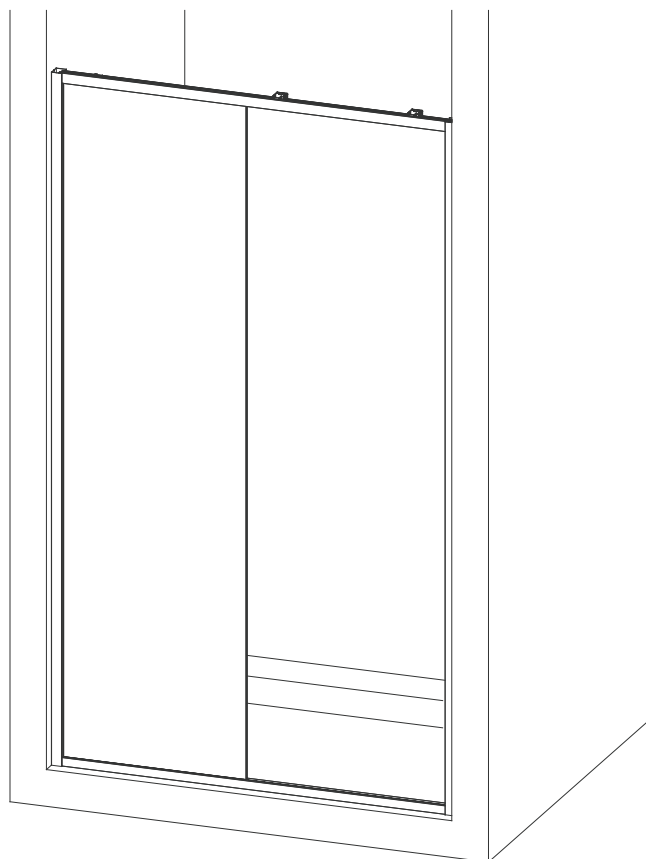





Step A9

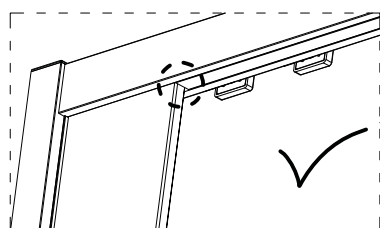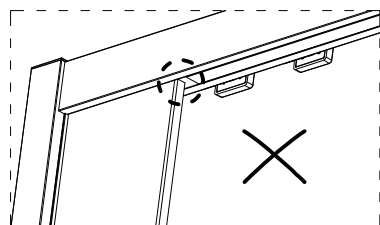







Check if there is gap here and adjust the track cover installation if necessary.

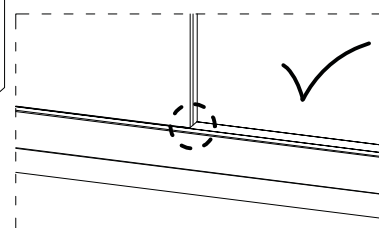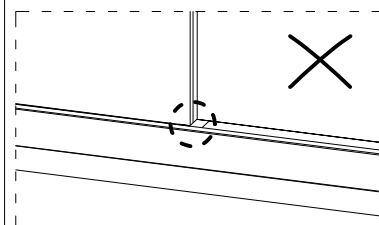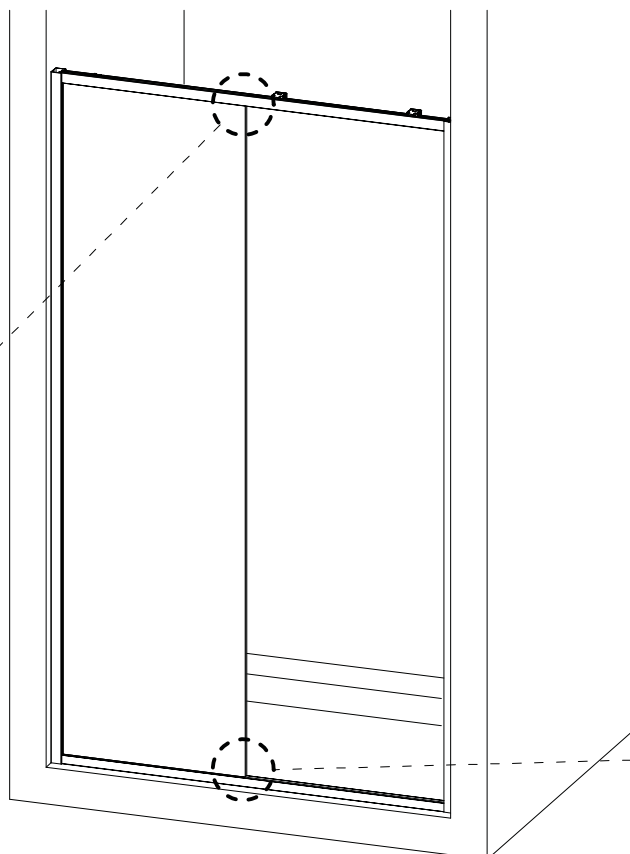



Step A10

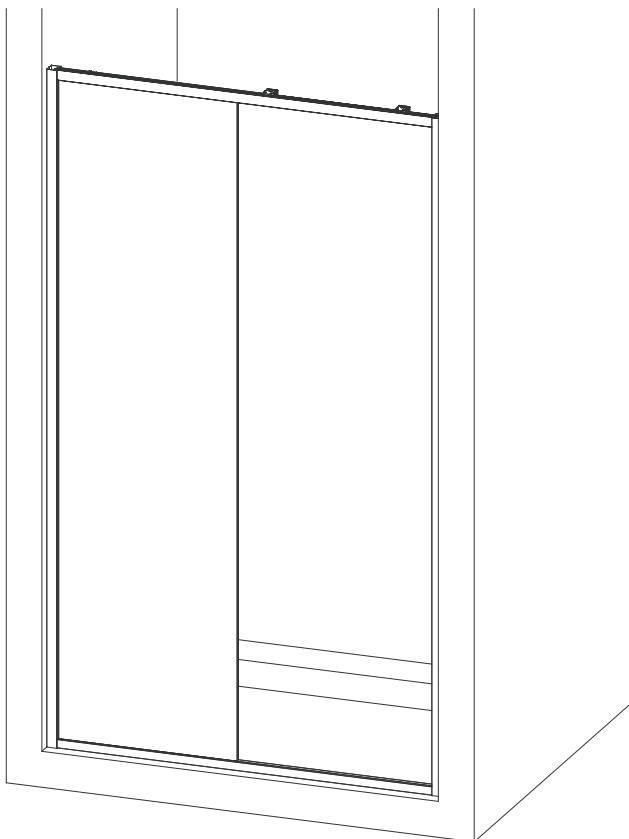



Step A11

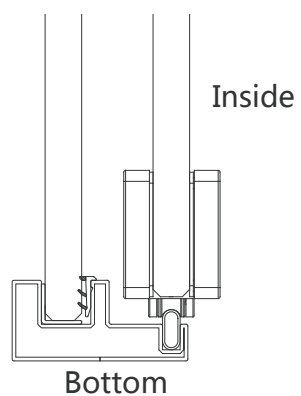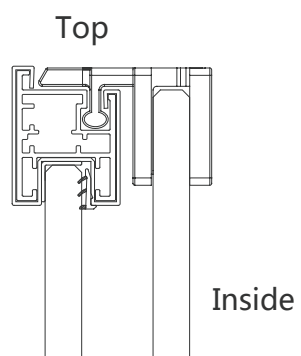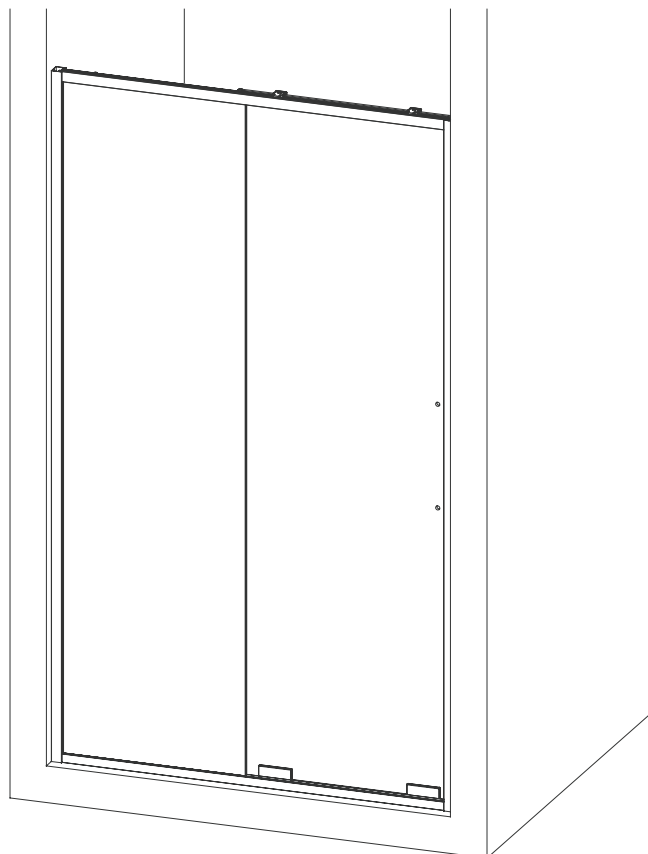



Step A12

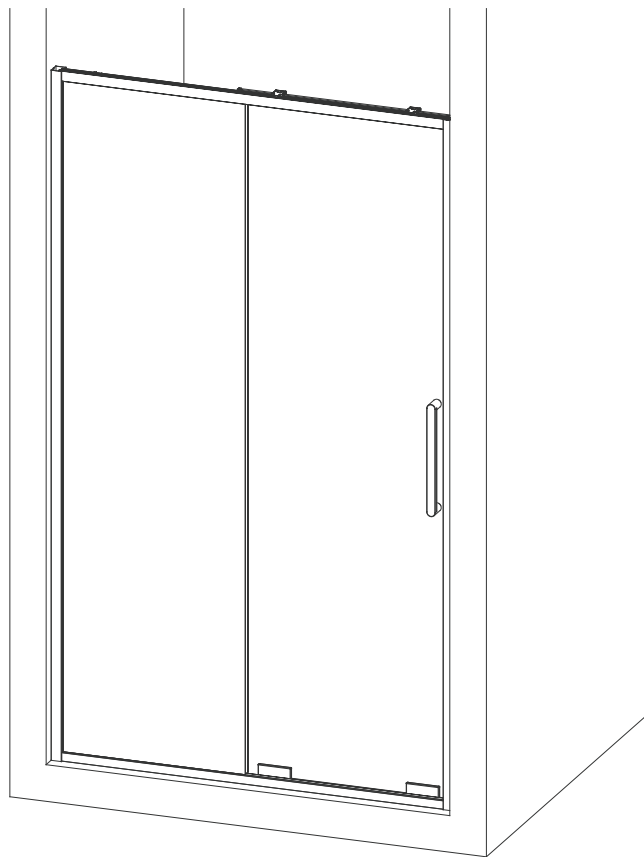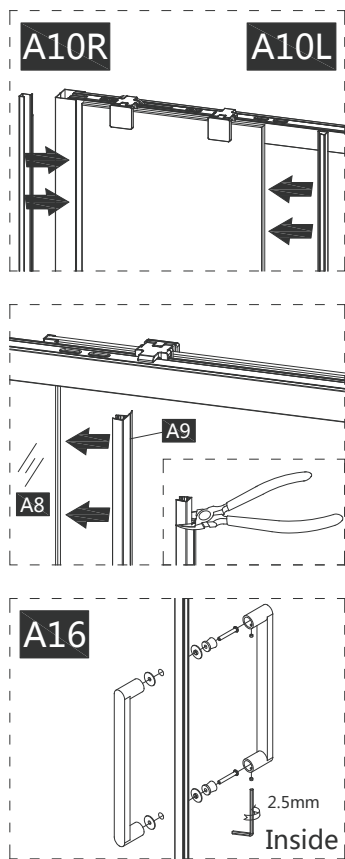




Step A13

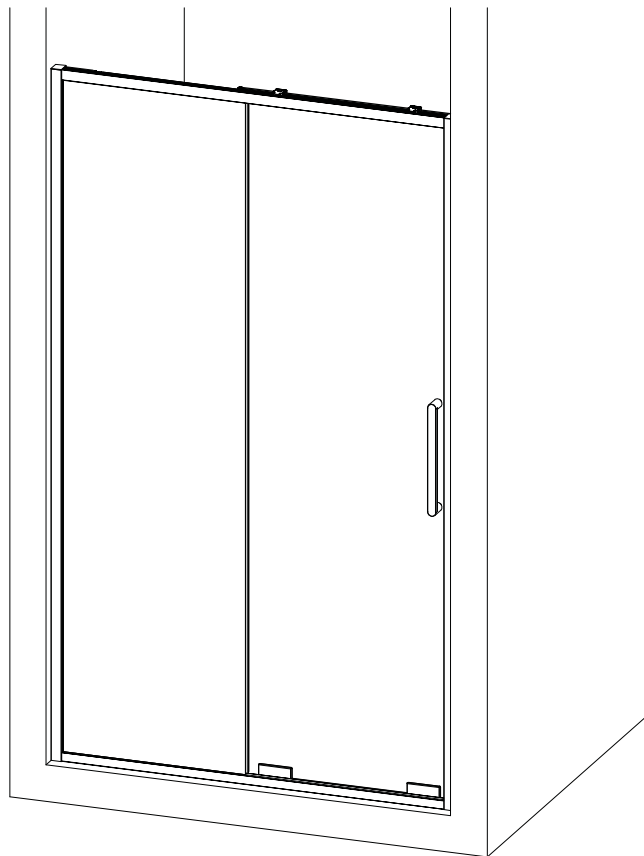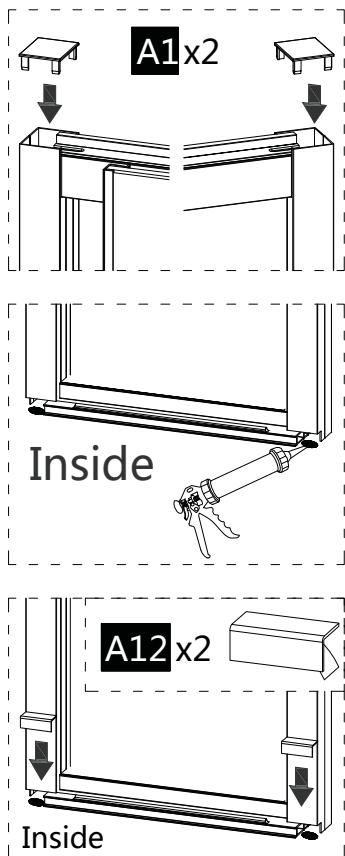

Step A14









Please check the door opens and closes smoothly and the seal fully engages along its entire length.

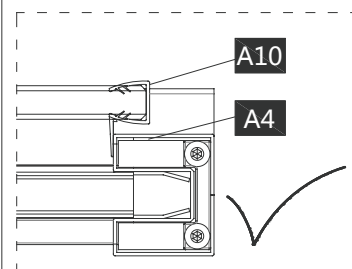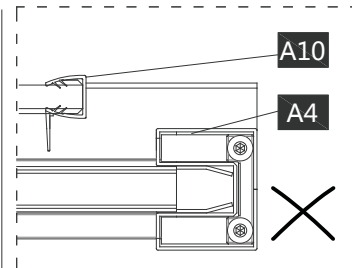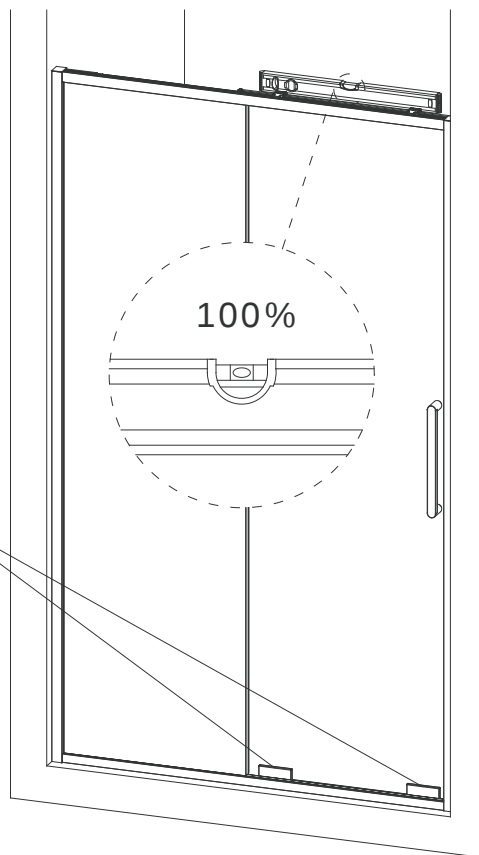



When closing the moving door ensure the long seal to wall profile fully engages along the full height.

Step A15



If adjustment of the door opening and closing is required. Loosen all 4 screws as shown. Manually open and close the door and ensure the seal closes correctly on both sides as step 3, repeat and check. Tighten all 4 screws as shown.

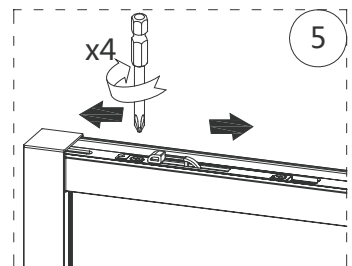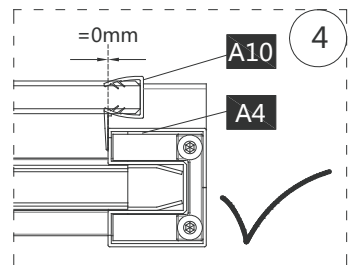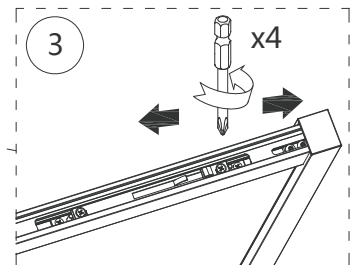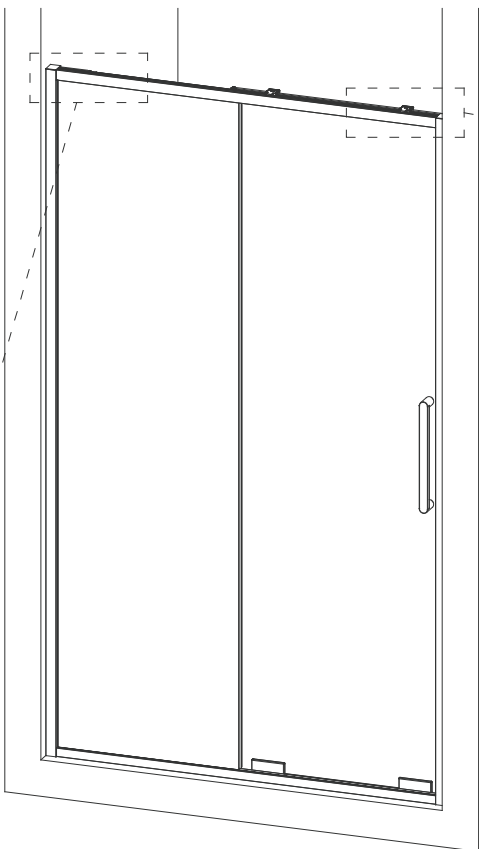








Step A16

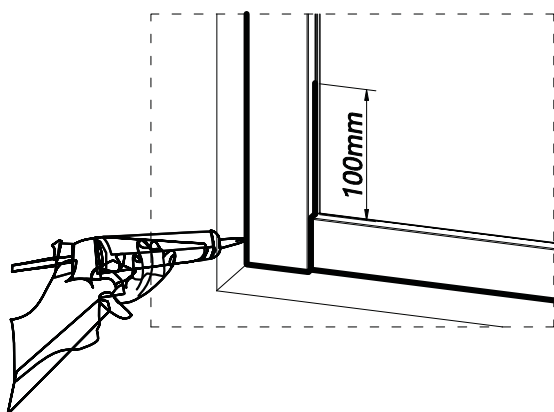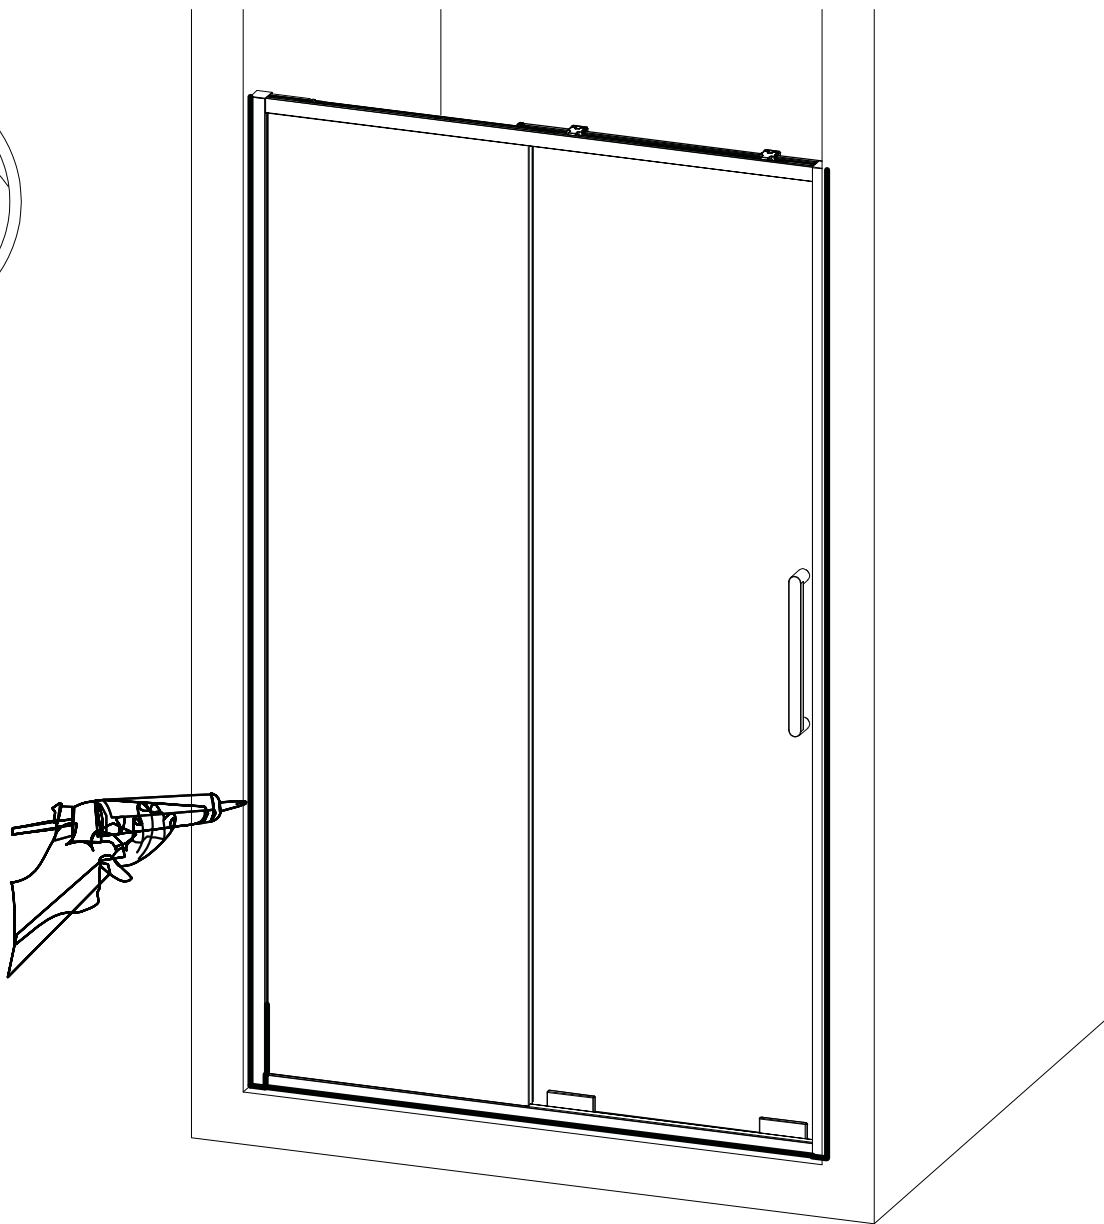


Step B1

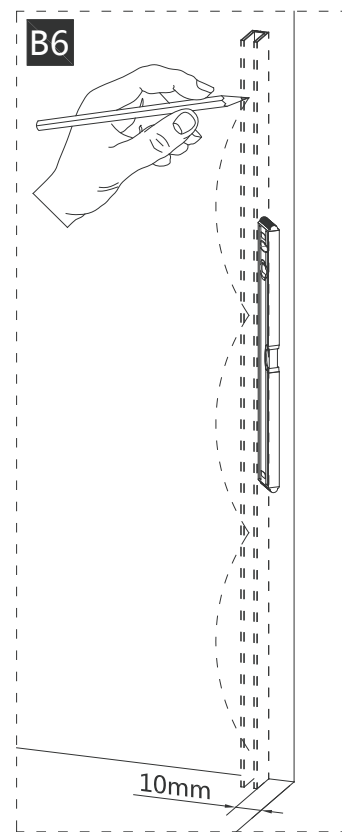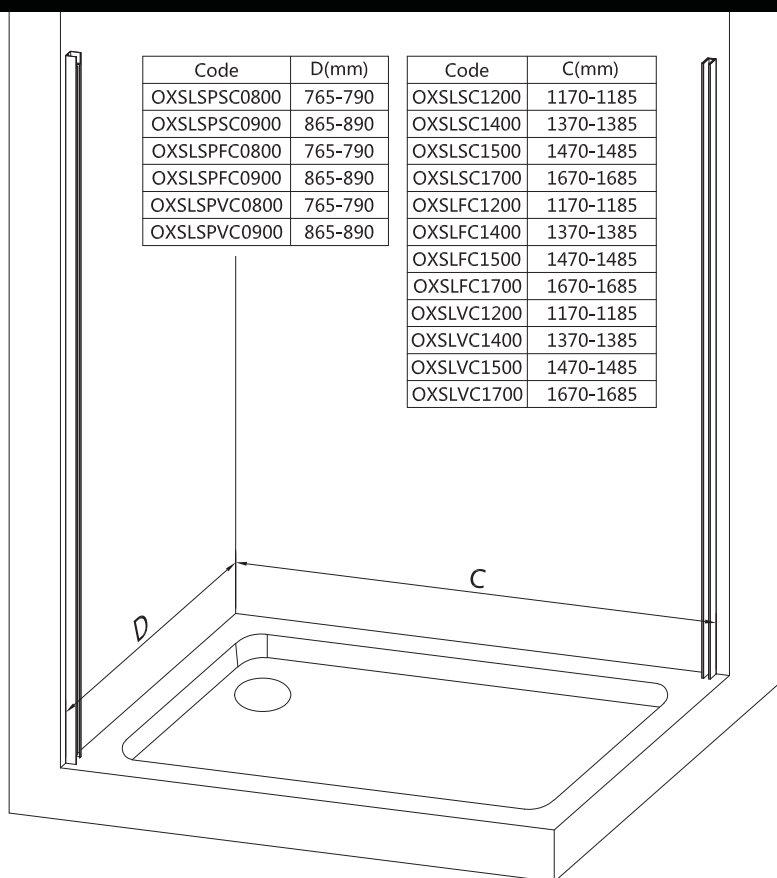


Step B2

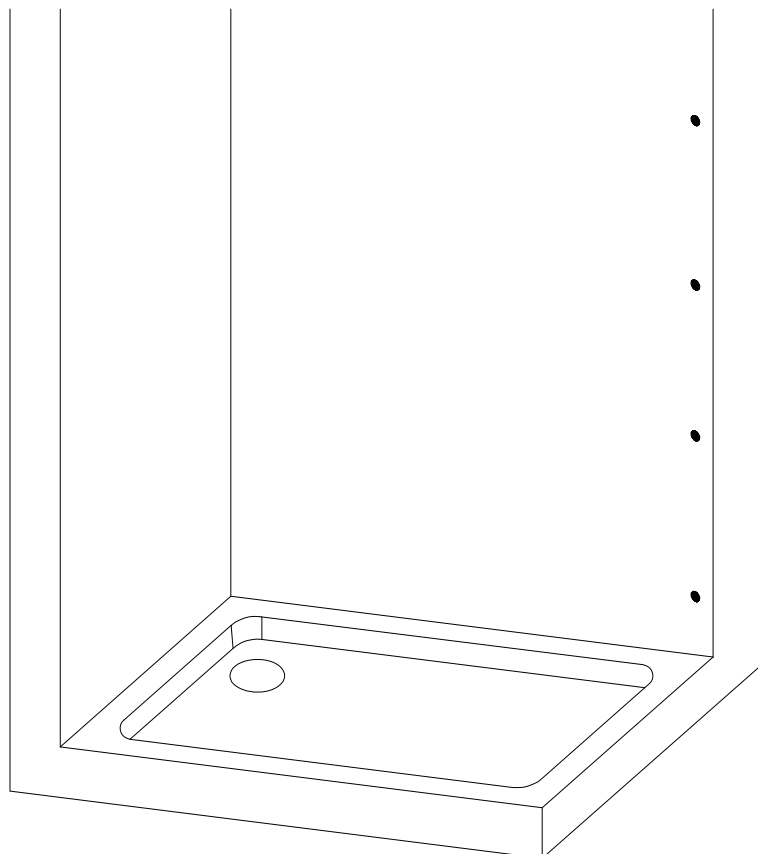

Step B3



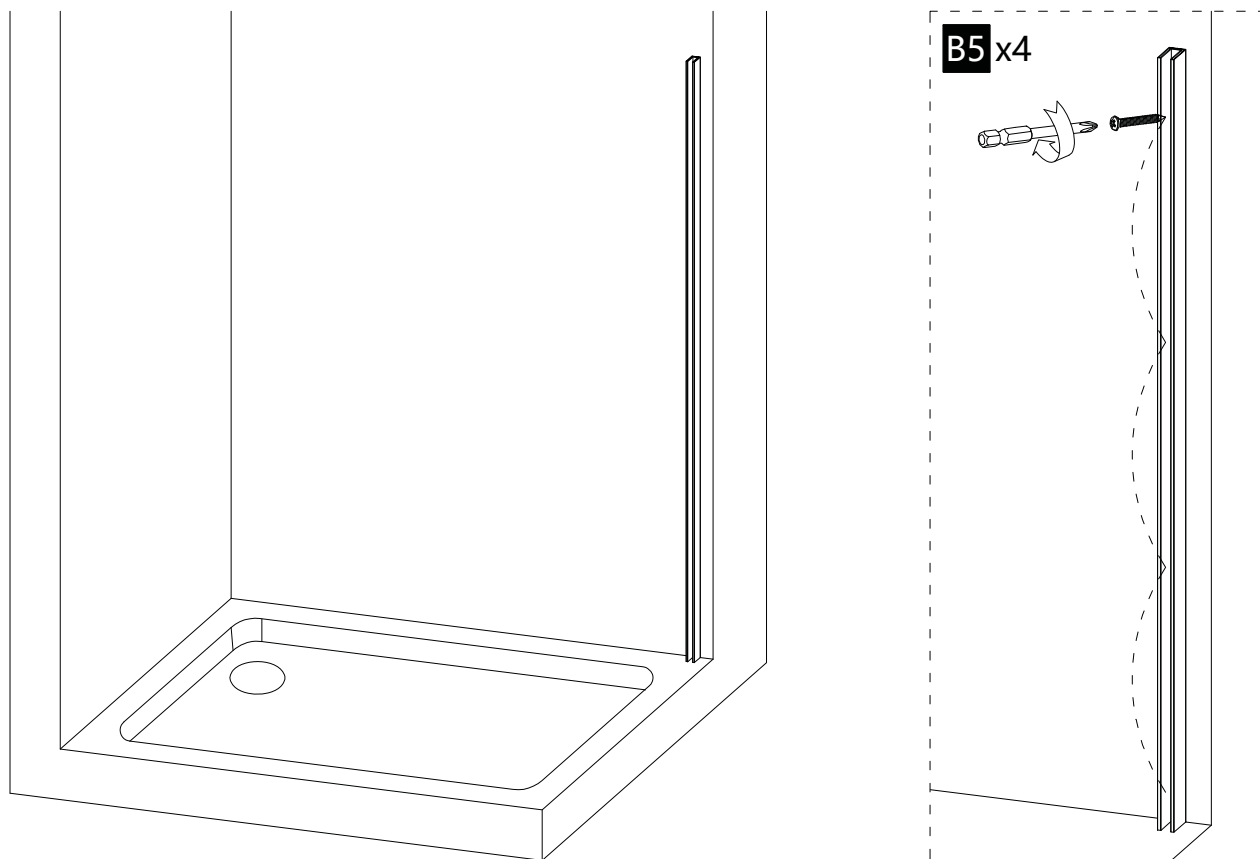


Step B4



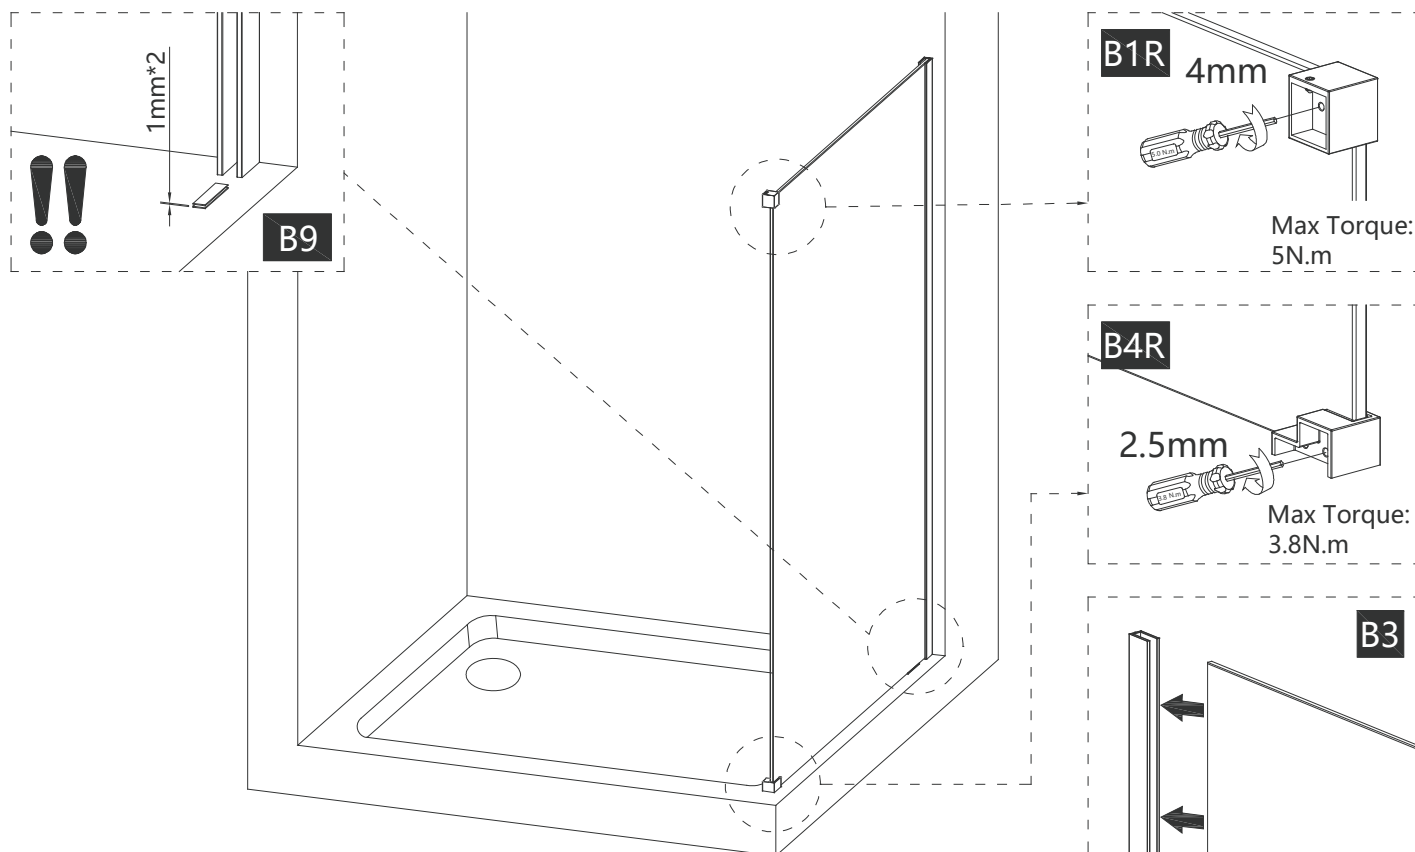




Step B7









Please check if the door can fully and smoothly open and close

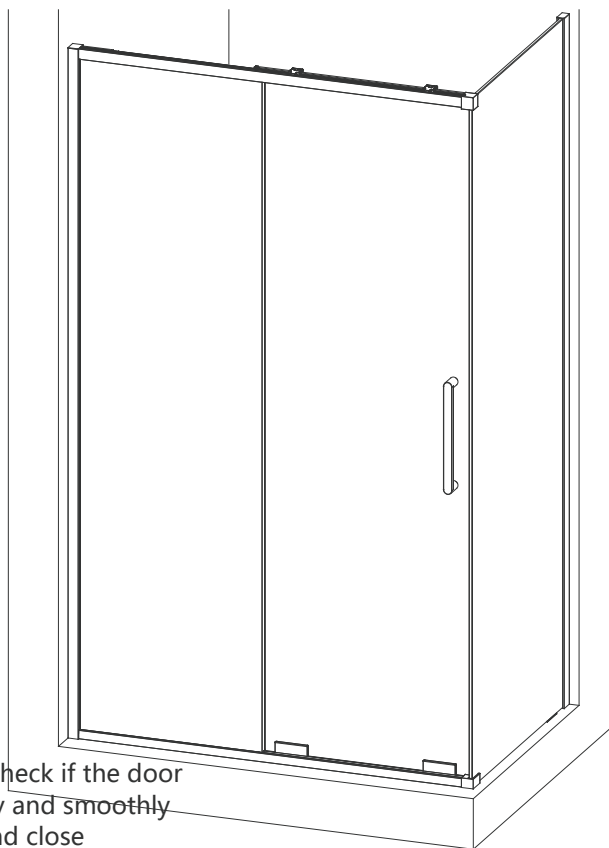


When closing the moving door ensure the long seal to side panel fully engages along the full height.

Step B8

If adjustment is needed, please loosen all screws of the soft close mechanism, then manually close the door and adjust the soft close mechanism to proper position, and then re-tighten the screws.

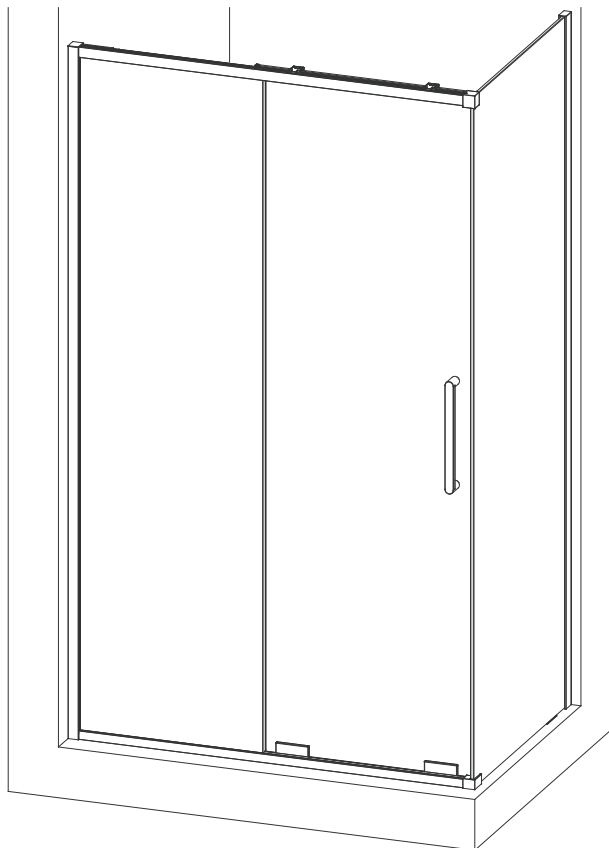

Step B9

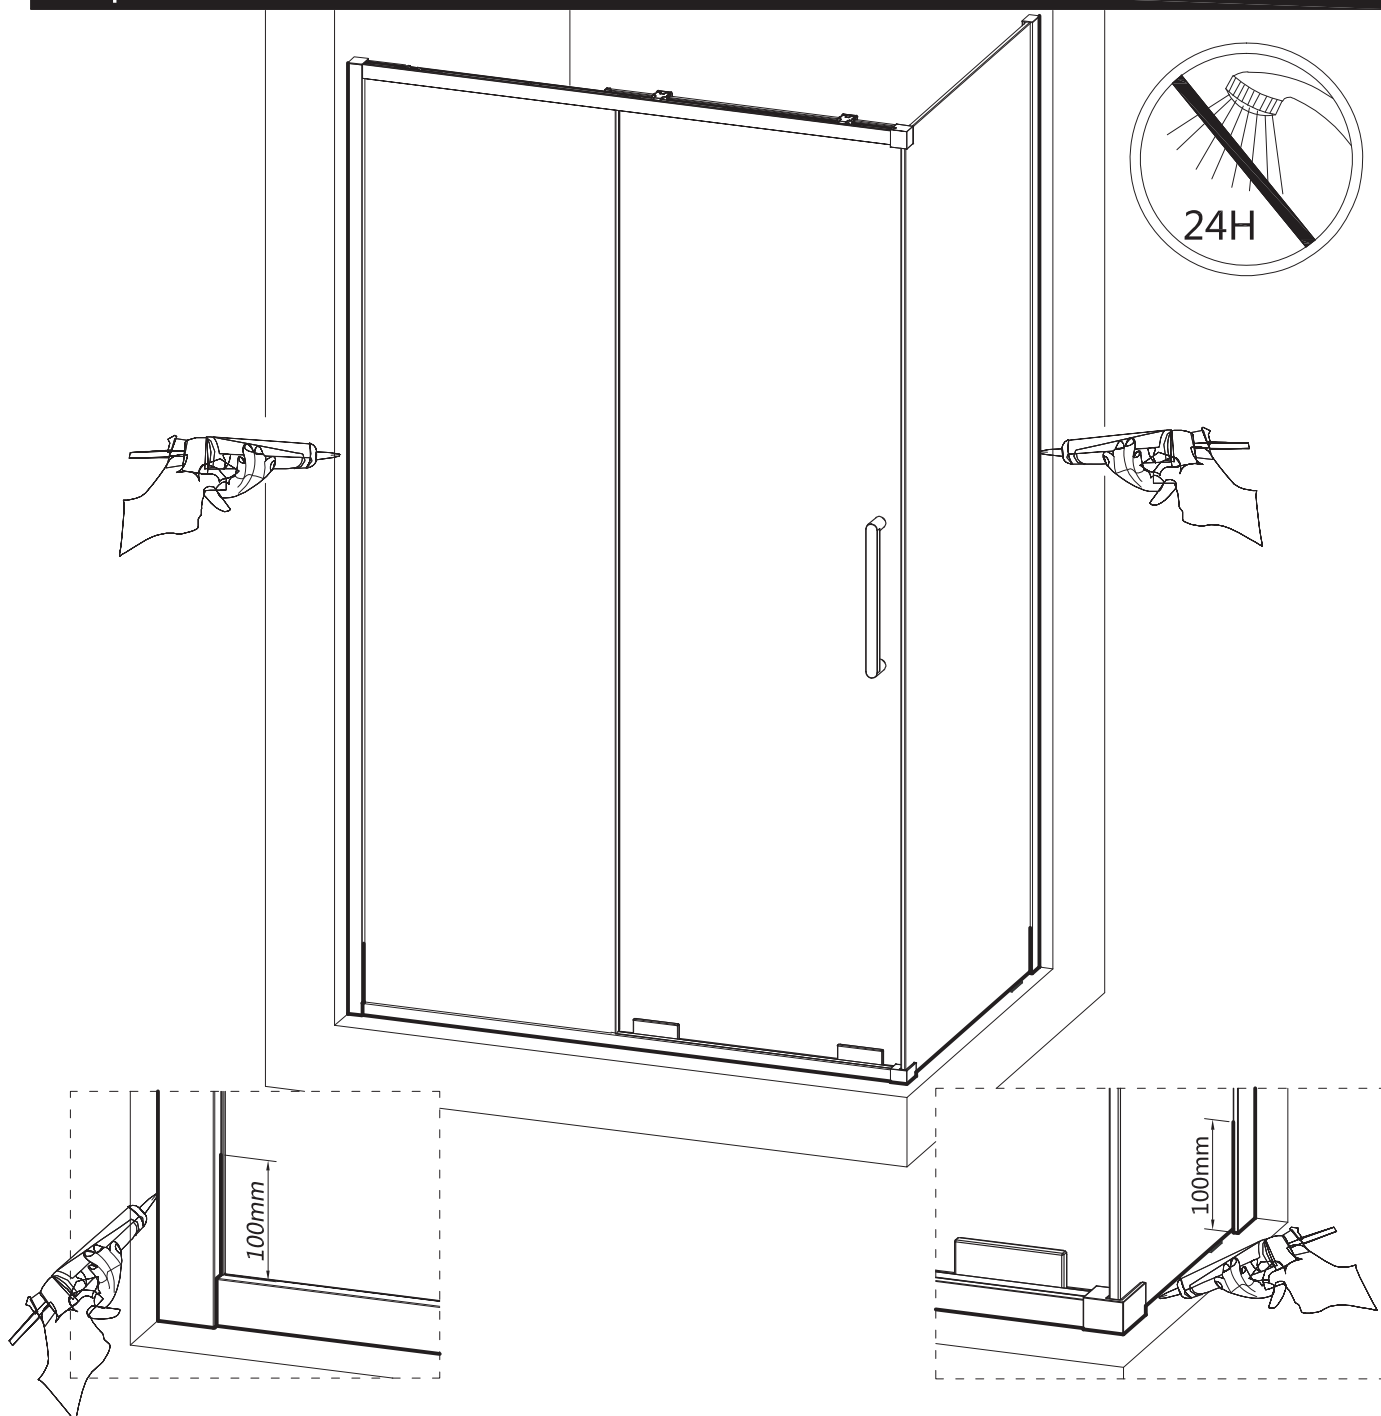

crosswater[®]
SHOWERING

For any further information please contact Crosswater
Phone number, 0345 873 8840
Website, www.crosswater.co.uk
Email address, sales@crosswater.co.uk
The manufacturer reserves the right to make technical
modifications without prior notice.