Optix 10 Pivot Door with Inline Panel

Manufactured to: BS EN 14428

IMPORTANT

BEFORE STARTING THE INSTALLATION ENSURE ALL THE DOOR SIZE MEASUREMENTS CORRESPOND WITH THE INSTALLATION AREA INCLUNDING THE FINISHED TILED/PANELLED WALLS.
RETURNS DUE TO INCORRECT SIZING WILL NOT BE ACCEPTED.

OXPDxC0800 52Kgs
OXPDxC0900 57Kgs
OXPDxC1000 62Kgs
OXPDxC1200 72Kgs
OXPDxC1400 82Kgs

OXPDSPxC0800 46Kgs
OXPDSPxC0900 51Kgs

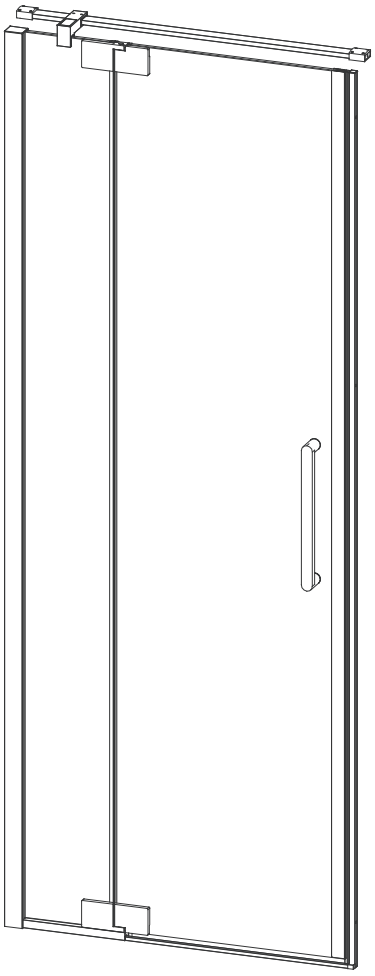

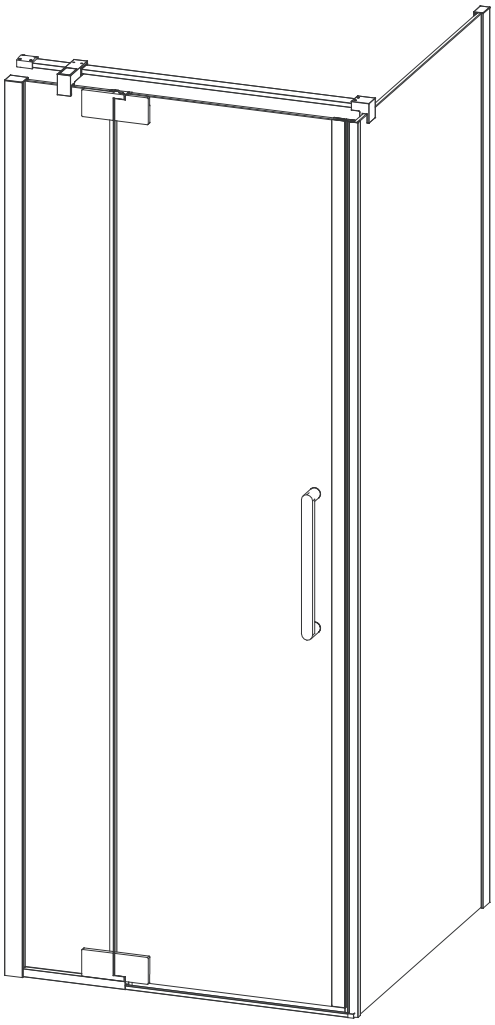

Optix 10 Pivot Door with Inline Panel

Optix 10 Side Panel Pivot & Inline

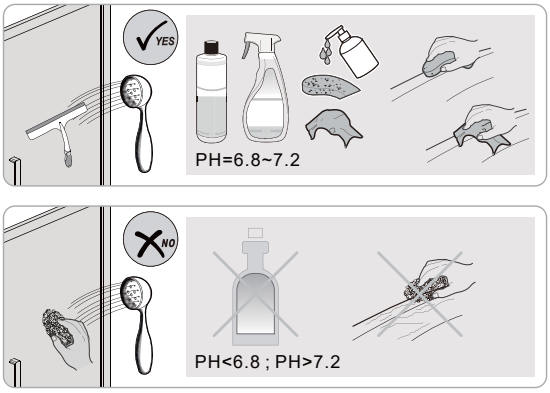

INSTALLATION INSTRUCTIONS

crosswater®
SHOWERING

A

crosswater
SHOWERING

IMPORTANT - Please read before installation

Please read these instructions carefully before starting installation and keep in a safe place for future reference.

Check the contents of the pack carefully before installation. Crosswater will not be held responsible for any de-fit / re-fit costs where faulty product has been fitted.
If any fault is found with materials or workmanship, it must be reported immediately to the manufacturer. Remedial action will be taken, based on information received, on condition that:
1. Full details are supplied to the manufacturer;
2. The enclosure has not been modified or tampered with;
3. The manufacturer is informed of any damage/shortages prior to installation.

We do not accept responsibility for any problems that may occur through incorrect installation.

The success of the installation and operation of any shower enclosure is, of course, dependant on the squareness, alignment and construction of the walls to which fixing is to be carried out.

VERY IMPORTANT
You must complete all tiling and grouting, and the shower tray **MUST** be level and fully sealed to the tiles before installation. If you do not fit the enclosure onto a tiled surface, or seal the tiles to the tray before installation, water may soak into the wall behind the wall profiles.

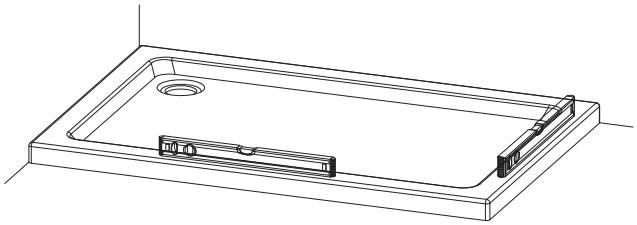

INSTALLATION - Advise and safety

The installation instructions are based on typical use and conditions.

All doors are designed to open outwards only.

These hints have been prepared for your guidance, you must exercise due care at all times.

For Health and Safety 2 people must carry out the installation of this enclosure.

Handle glass with care. Although the glass supplied is toughened safety glass(**EN12150**), impacts can damage both the glass and the frame.

Warning!
Please check for any hidden pipes or cables before drilling holes in the wall.

When using power tools always follow the manufacturers user instructions.

If the Framework is sealed to the tray on the inside, any water that may get into the framework will not be able to drain back into the tray, this may cause the enclosure to leak.

Leave the silicone sealant to dry for 24 hours before using the enclosure.

CARE AND CLEANING

Do not use solvents or abrasive material or chemicals to clean the enclosure.

Only clean using soapy water and soft cloth, rinse thoroughly afterwards.

INSTALLATION - Left and Right hand

This product is reversible for left or right hand opening.
Please follow the diagram, and detail below for your choice of installation.

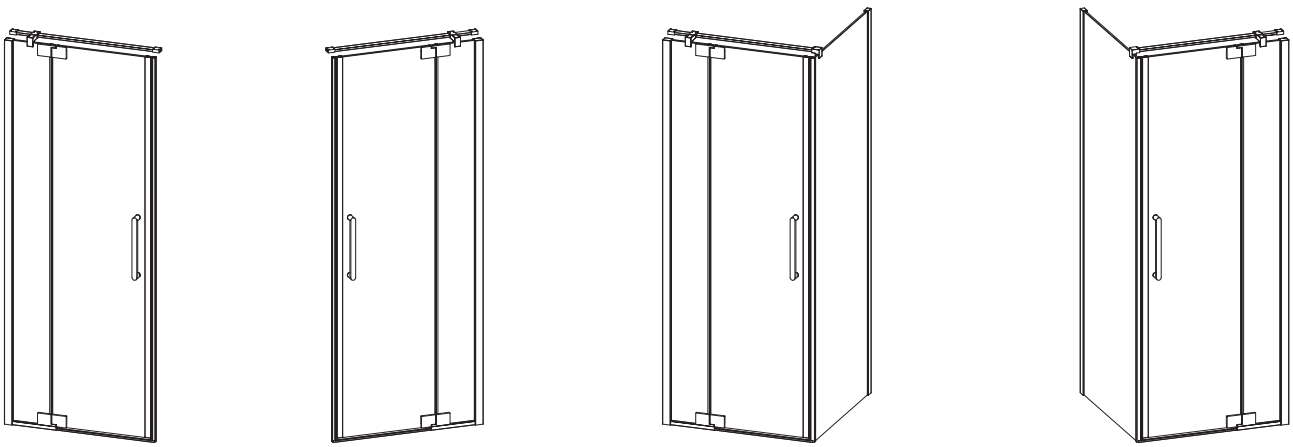

LH **RH** **LH** **RH**

crosswater
SHOWERING

Optix 10 Pivot Door with Inline Panel

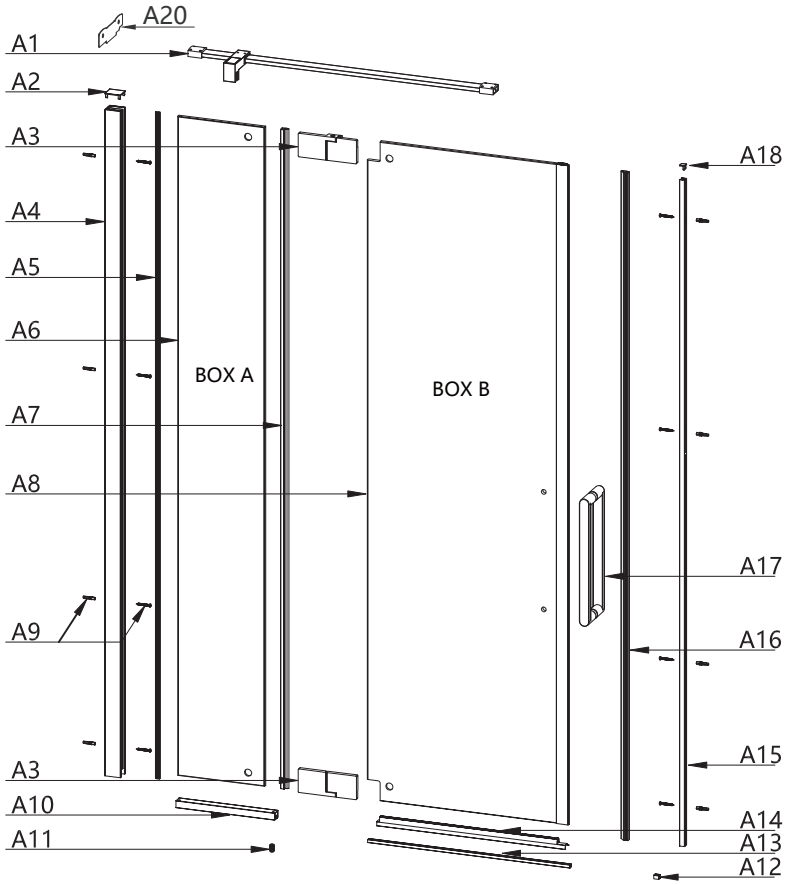

Optix 10 Side Panel Pivot & Inline

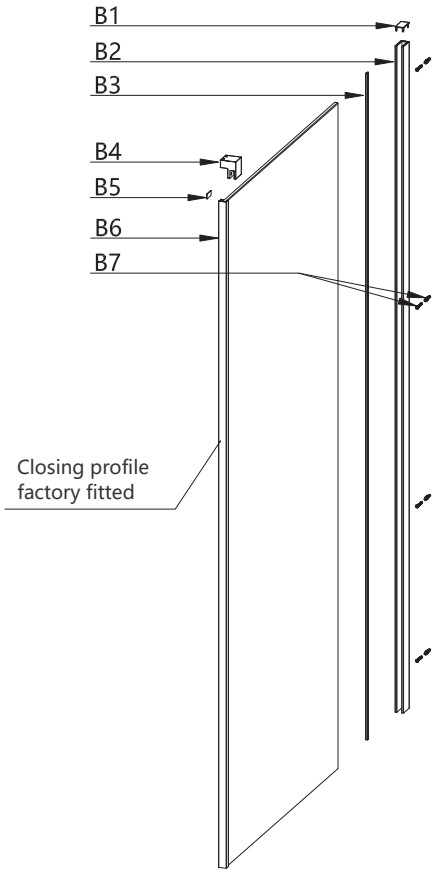

A1 Bracing bar with wall and glass clamps x1	A9 Wall plug and 4x35mm screw 8+8	A17 Handle x1	B1 Wall profile cap x1
A2 Wall profile cap x1	A10 Bottom profile fixed panel x1	A18 Magnetic profile cap x1	B2 Wall profile x1
A3 Hinge L R	A11 Screw for hinge x1	A19 Spacer x2	B3 Wall profile seal x1
A4 Wall profile x1	A12 Bottom profile cap x1	A20 Bracing bar template x1	B4 Side panel glass clamp x1
A5 Wall profile seal x1	A13 Breakwater profile moving door x1	A21 Allen Key 4mm 3mm 2.5mm 2mm	B5 Glass clamp screw cover x1
A6 Fixed panel x1	A14 Bottom seal x1	A22 Wedge gasket tool x1	B6 Side panel x1
A7 Long water seal x1	A15 Magnetic profile x1		B7 Wall plug and 4x35mm screw x4
A8 Moving panel x1	A16 Magnetic seal x1		

Installation tool







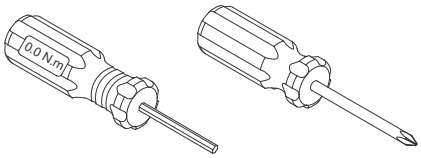

Torque screwdriver





⌀ 6.5





Left or Right hand installation

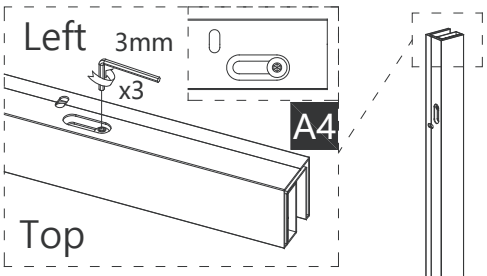







Step A1

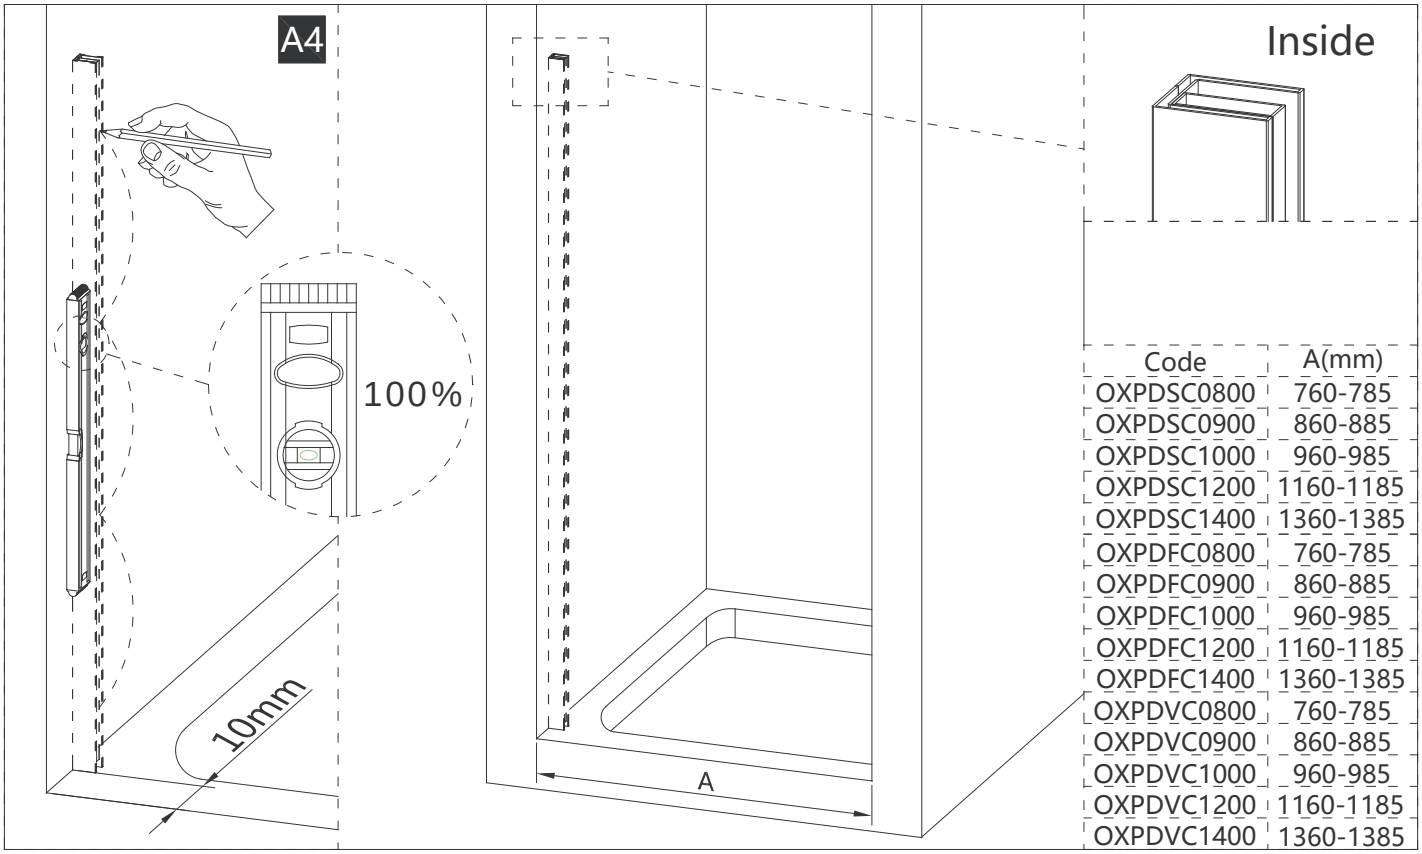

Code	A(mm)
OXPDSC0800	760-785
OXPDSC0900	860-885
OXPDSC1000	960-985
OXPDSC1200	1160-1185
OXPDSC1400	1360-1385
OXPDFC0800	760-785
OXPDFC0900	860-885
OXPDFC1000	960-985
OXPDFC1200	1160-1185
OXPDFC1400	1360-1385
OXPDVC0800	760-785
OXPDVC0900	860-885
OXPDVC1000	960-985
OXPDVC1200	1160-1185
OXPDVC1400	1360-1385

Step A2







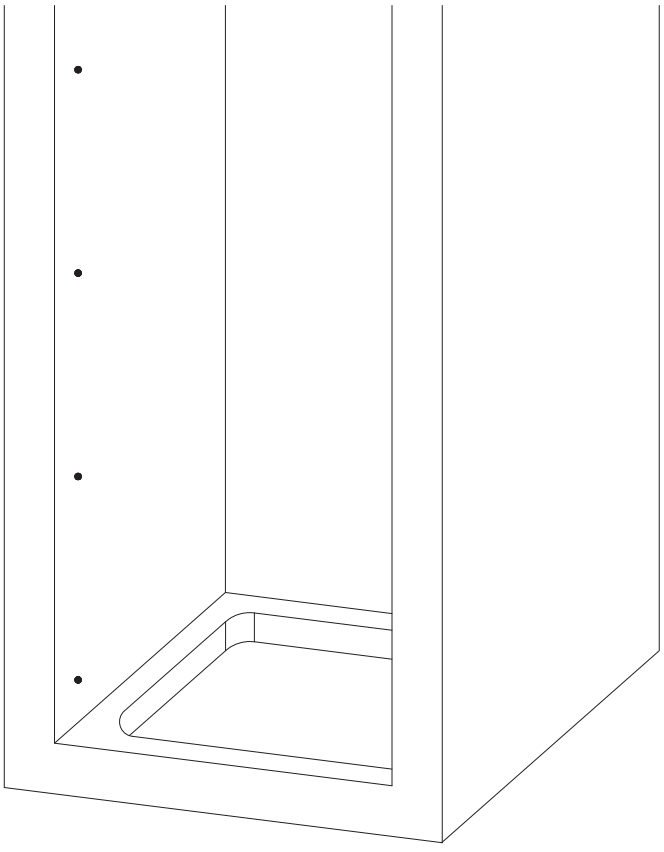

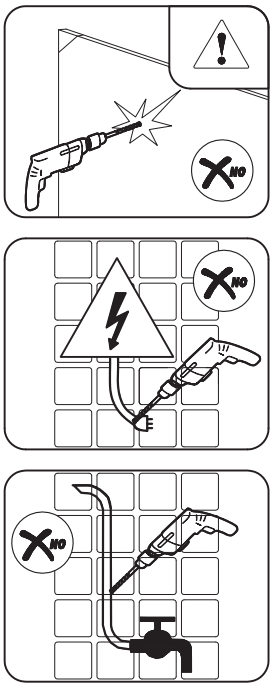

Step A3

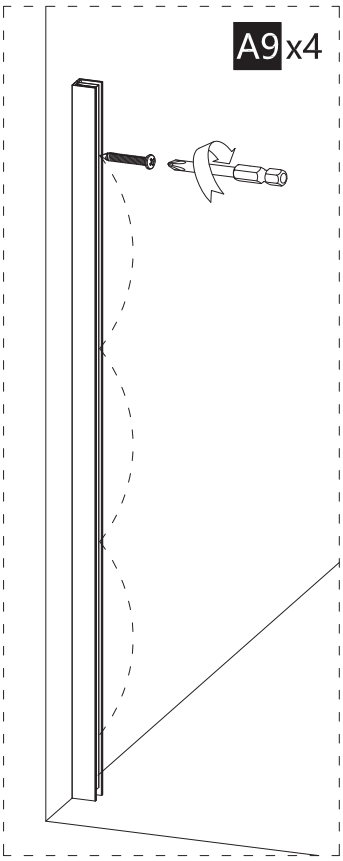

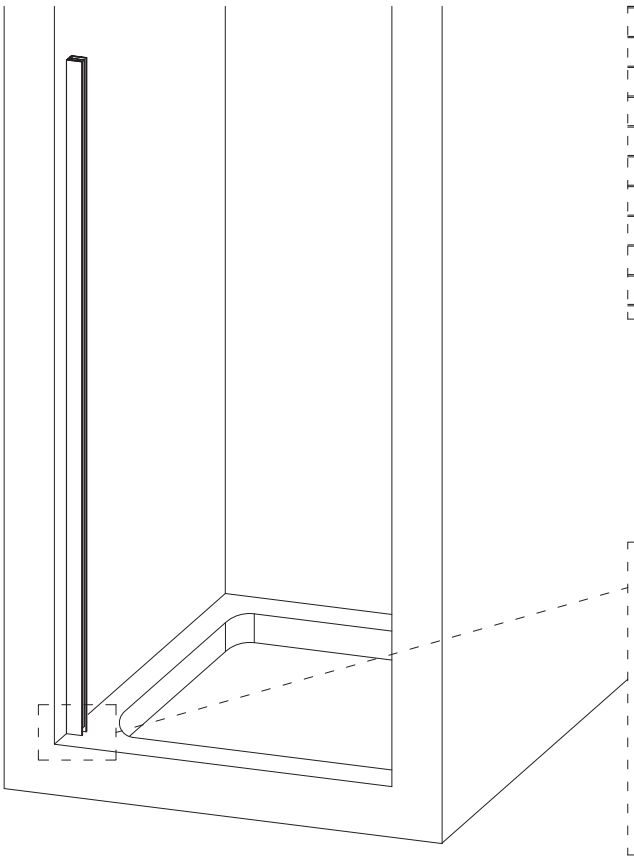

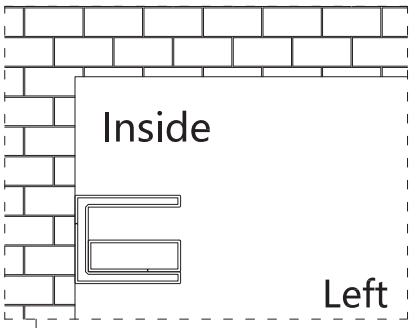

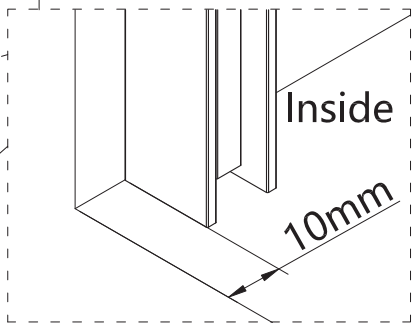

Step A4



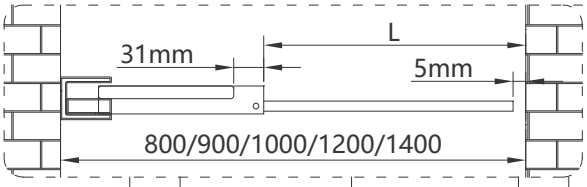

Code	L(mm)
OXPDSC0800	515
OXPDSC0900	515
OXPDSC1000	615
OXPDSC1200	665
OXPDSC1400	665
OXPDFC0800	515
OXPDFC0900	515
OXPDFC1000	615
OXPDFC1200	665
OXPDFC1400	665
OXPDVC0800	515
OXPDVC0900	515
OXPDVC1000	615
OXPDVC1200	665
OXPDVC1400	665



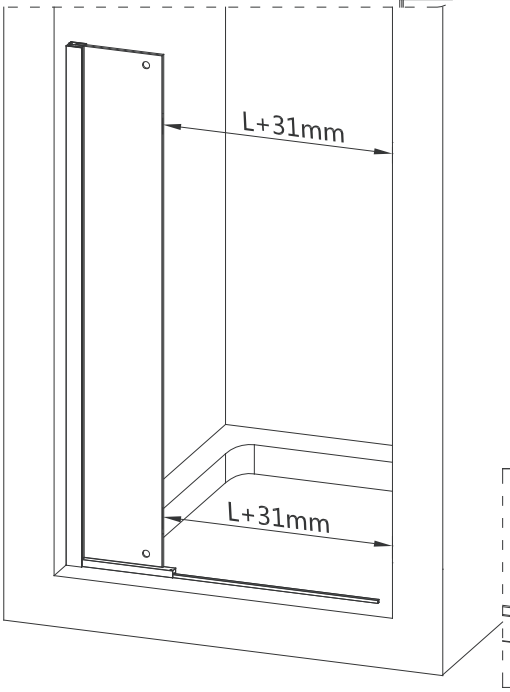

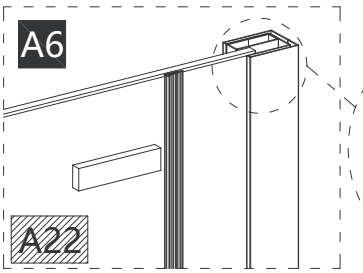





Step A5

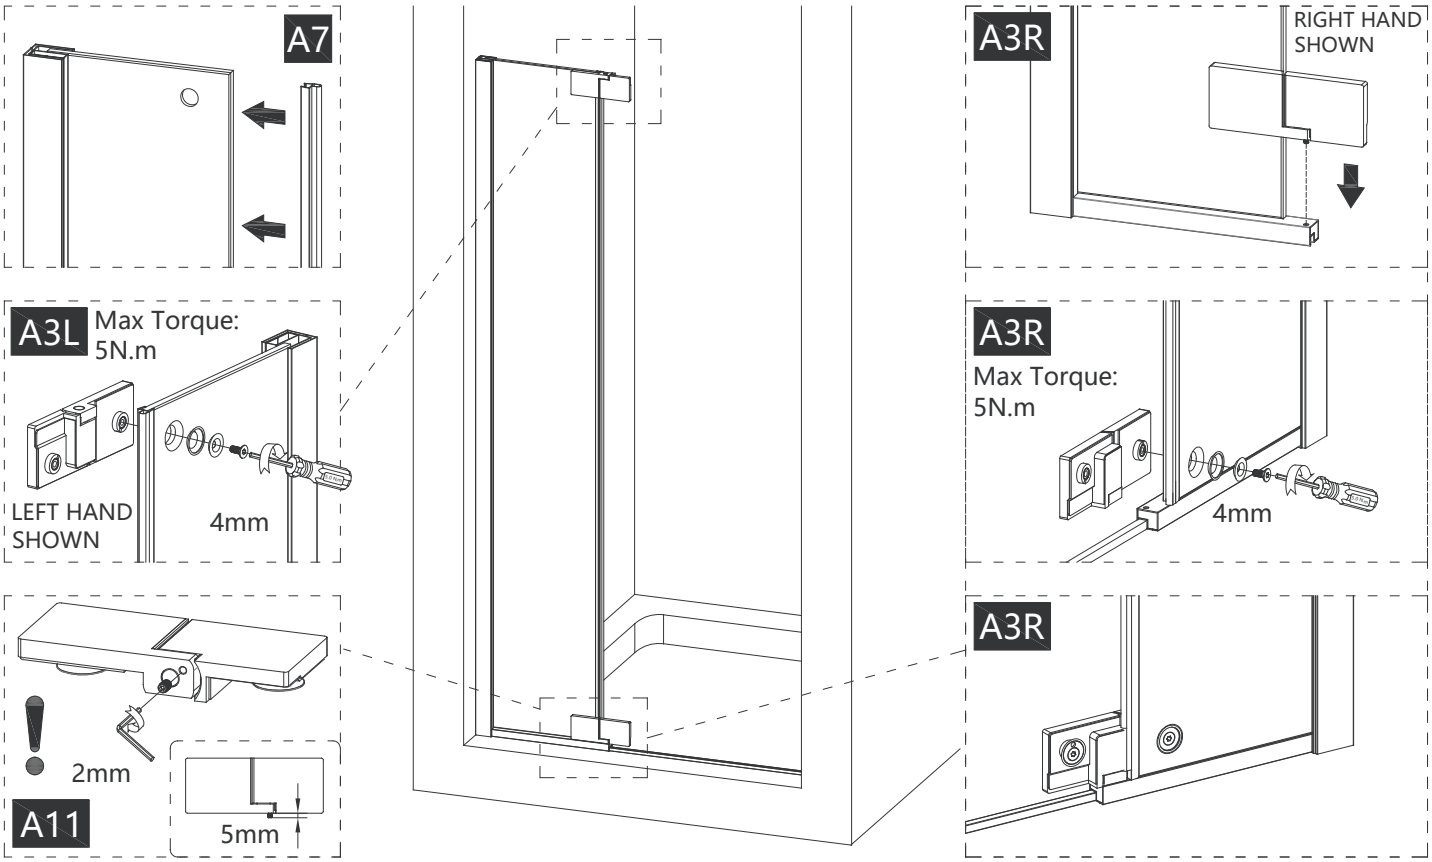

Step A6

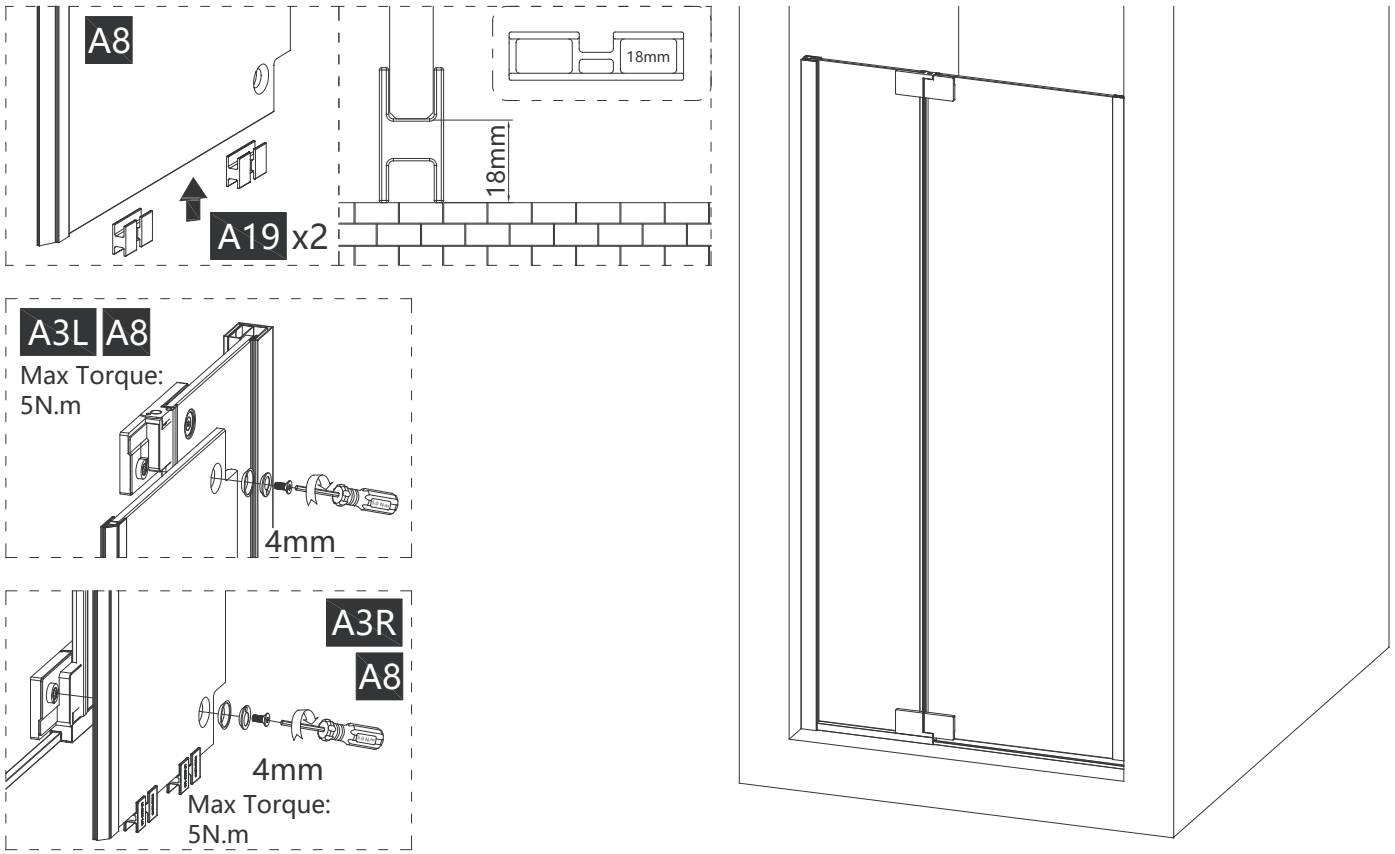

Step A7







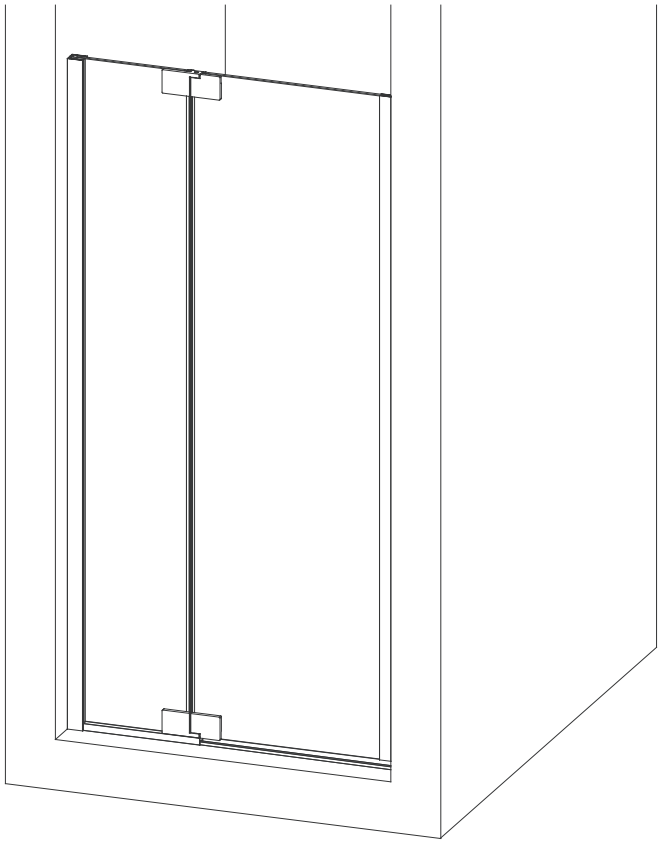

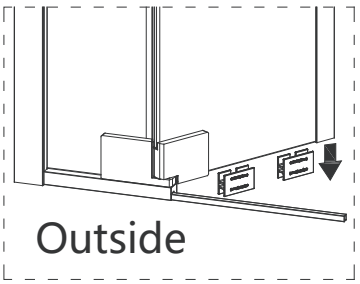

Step A8

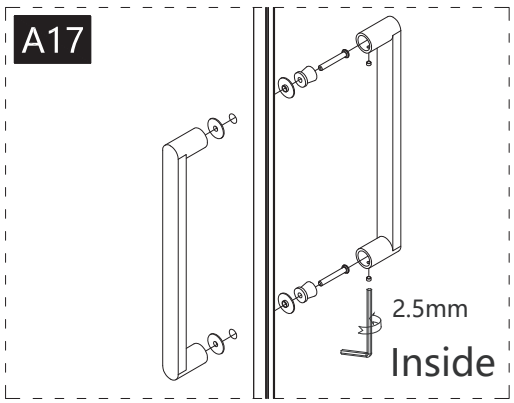

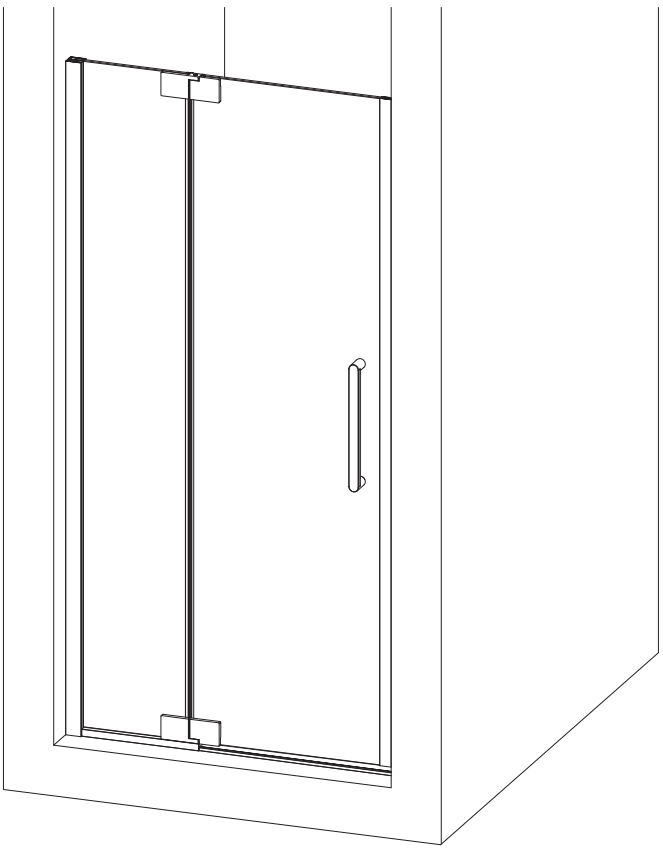

Step A9

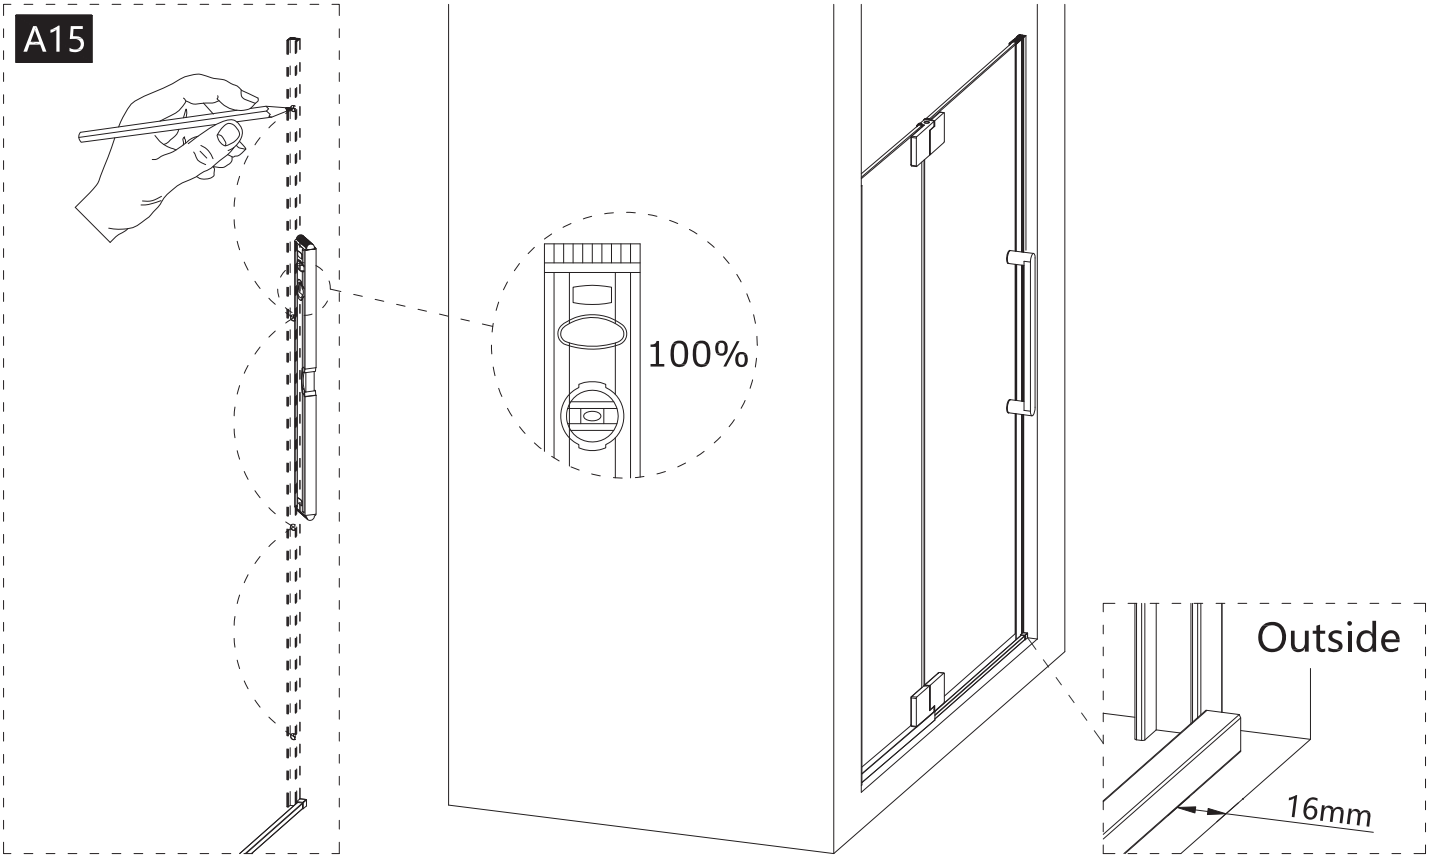

Step A10







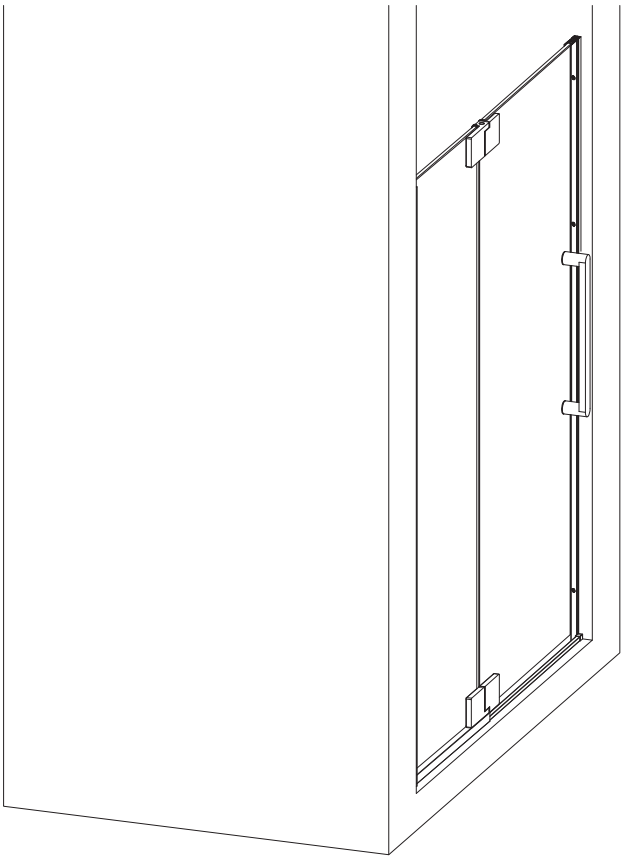

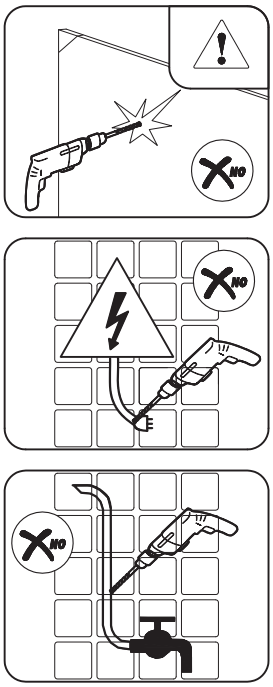

Step A11

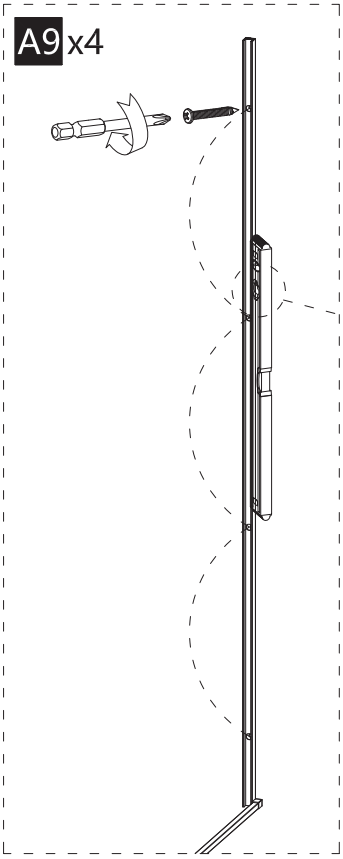

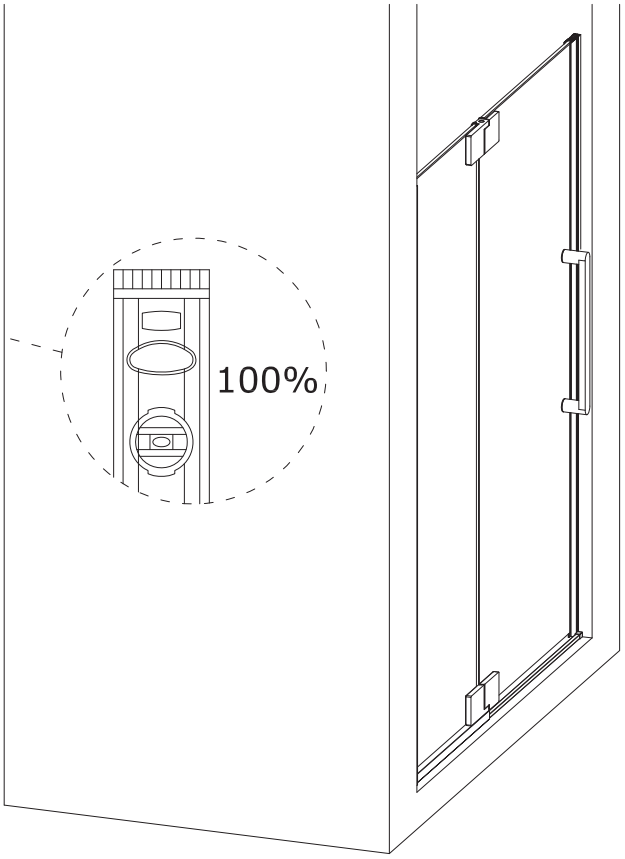



Step A12







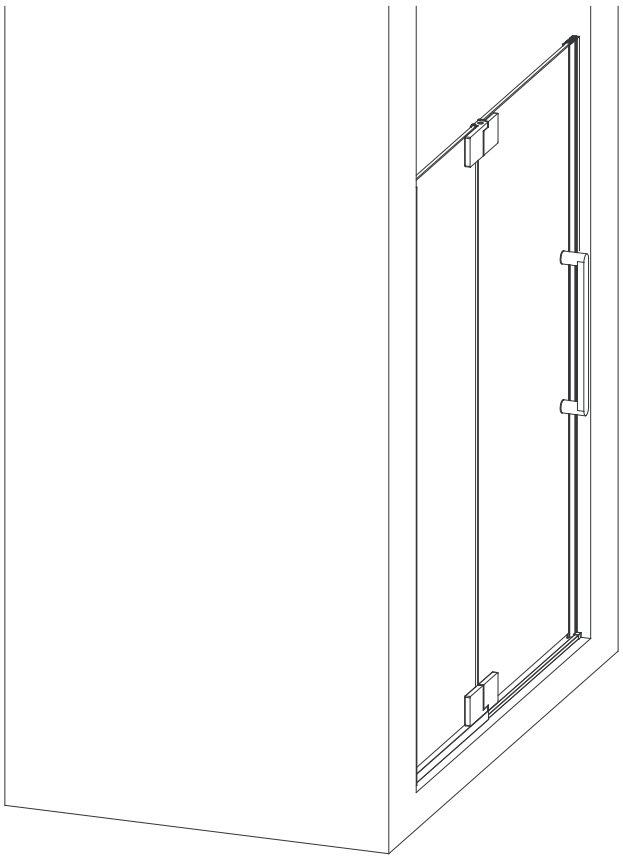



Step A13









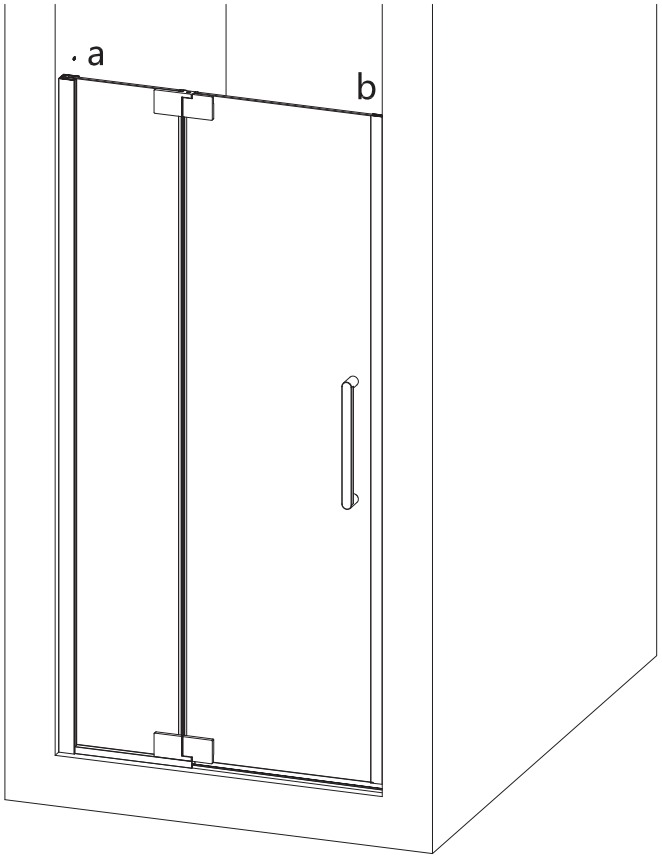

Step A14







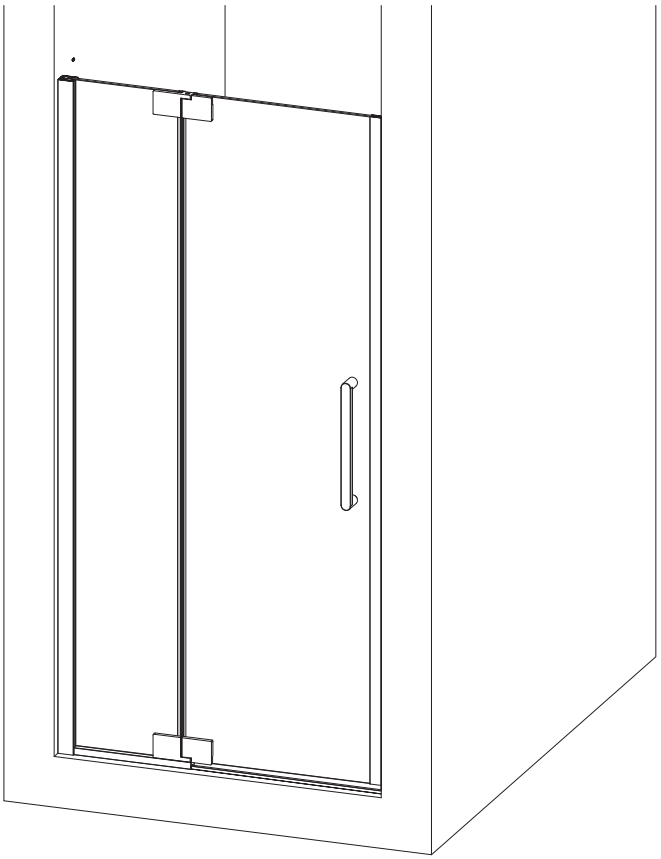







Step A15







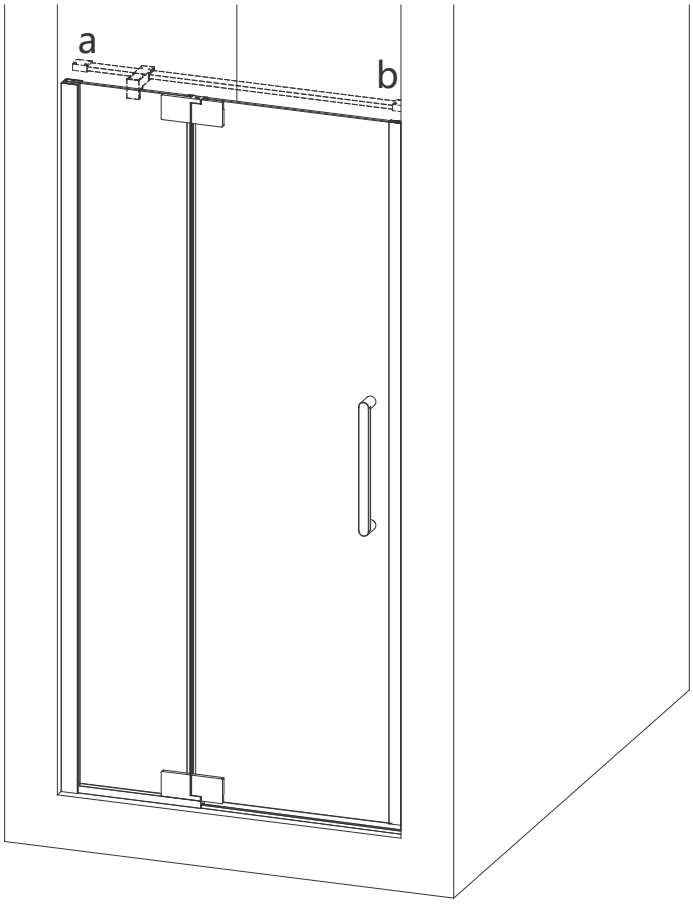

Step A16







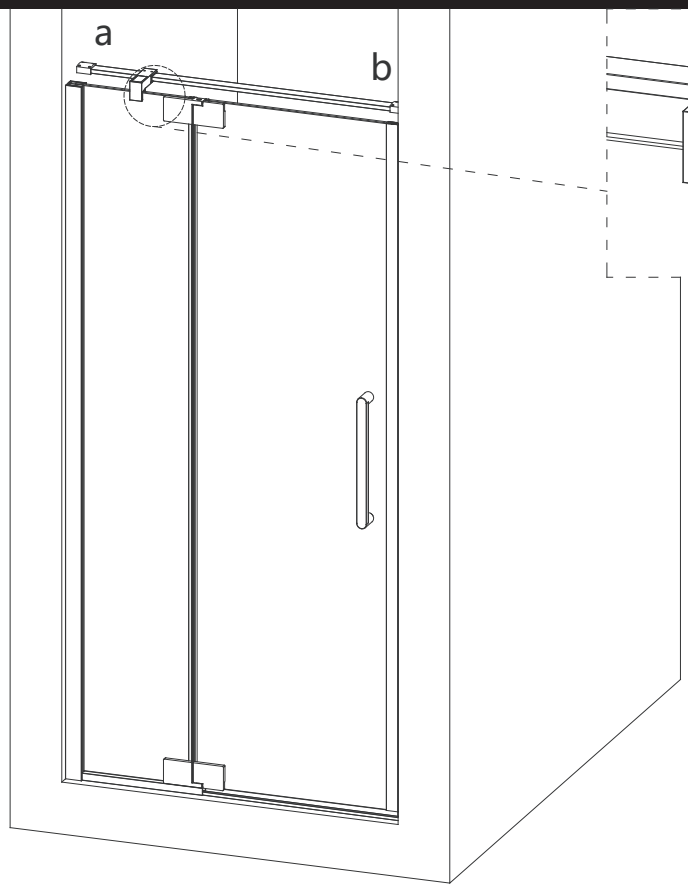



Step A17







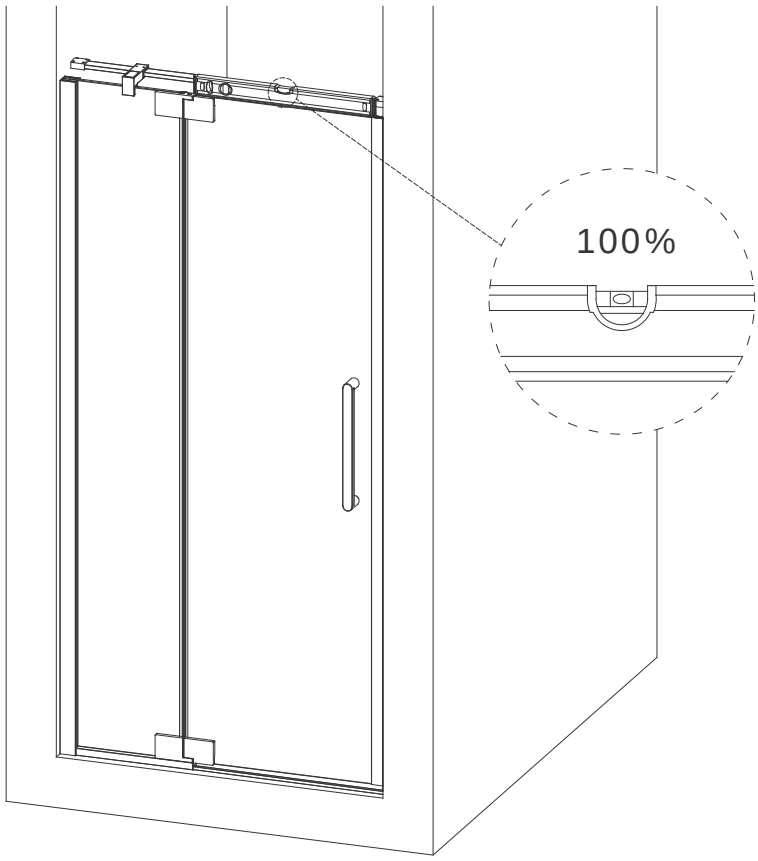

Step A18







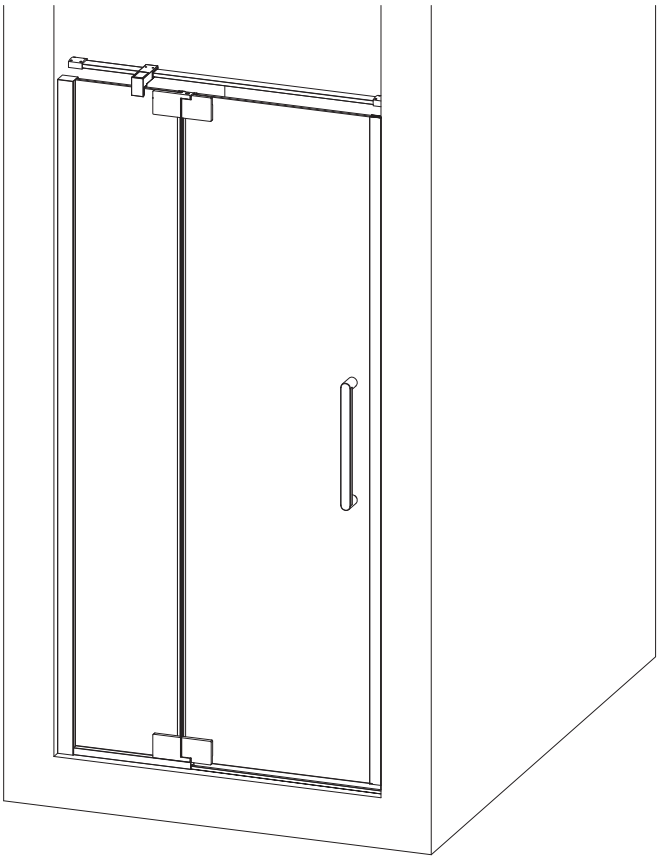







Step A19

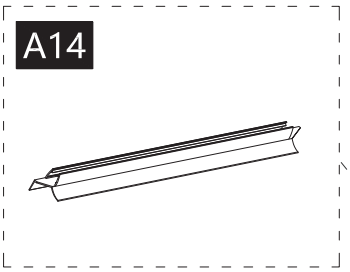





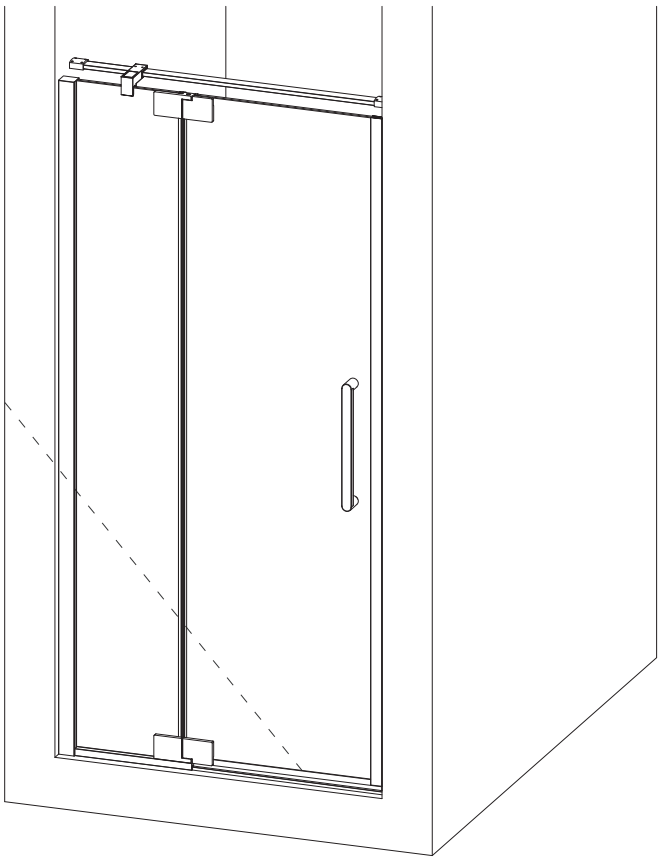

Step A20



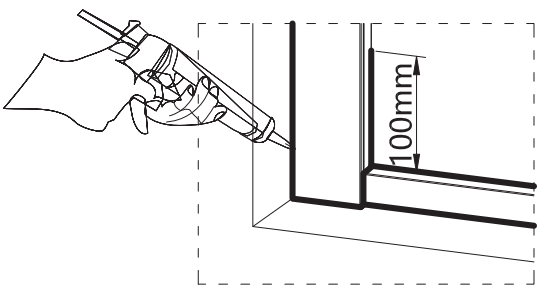

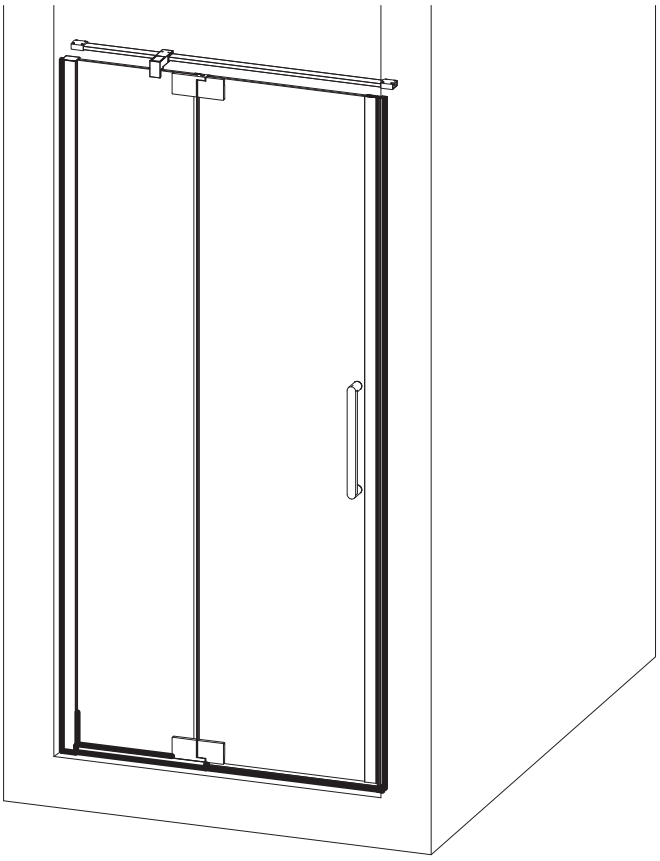

Step B1

Code	A(mm)
OXPDSPSC0800	775-795
OXPDSPSC0900	875-895
OXPDSPFC0800	775-795
OXPDSPFC0900	875-895
OXPDSPVC0800	775-795
OXPDSPVC0900	875-895

Code	B(mm)
OXPDSC0800	770-795
OXPDSC0900	870-895
OXPDSC1000	970-995
OXPDSC1200	1170-1195
OXPDSC1400	1370-1395
OXPDFC0800	770-795
OXPDFC0900	870-895
OXPDFC1000	970-995
OXPDFC1200	1170-1195
OXPDFC1400	1370-1395
OXPDVC0800	770-795
OXPDVC0900	870-895
OXPDVC1000	970-995
OXPDVC1200	1170-1195
OXPDVC1400	1370-1395

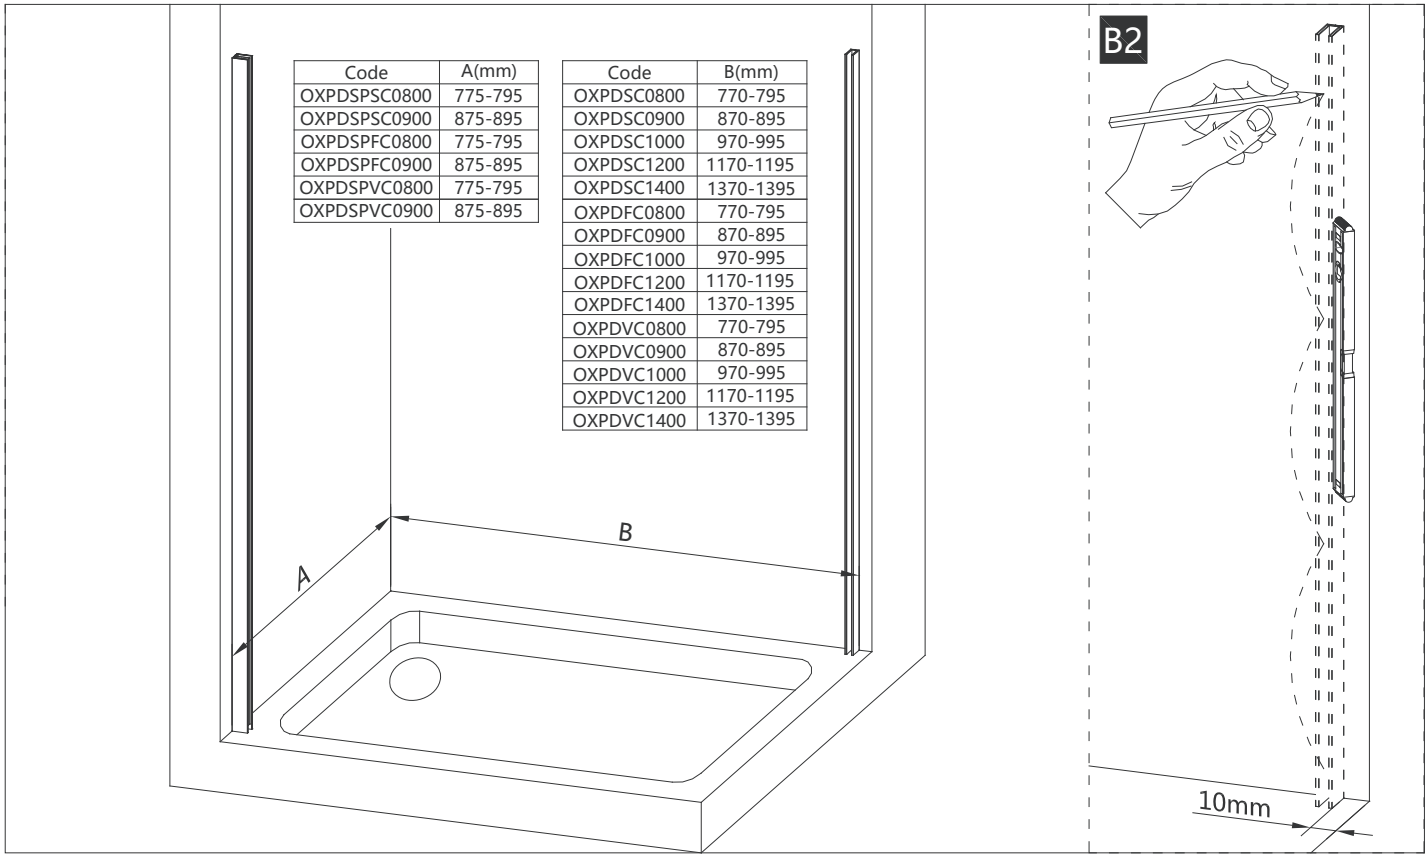

Step B2







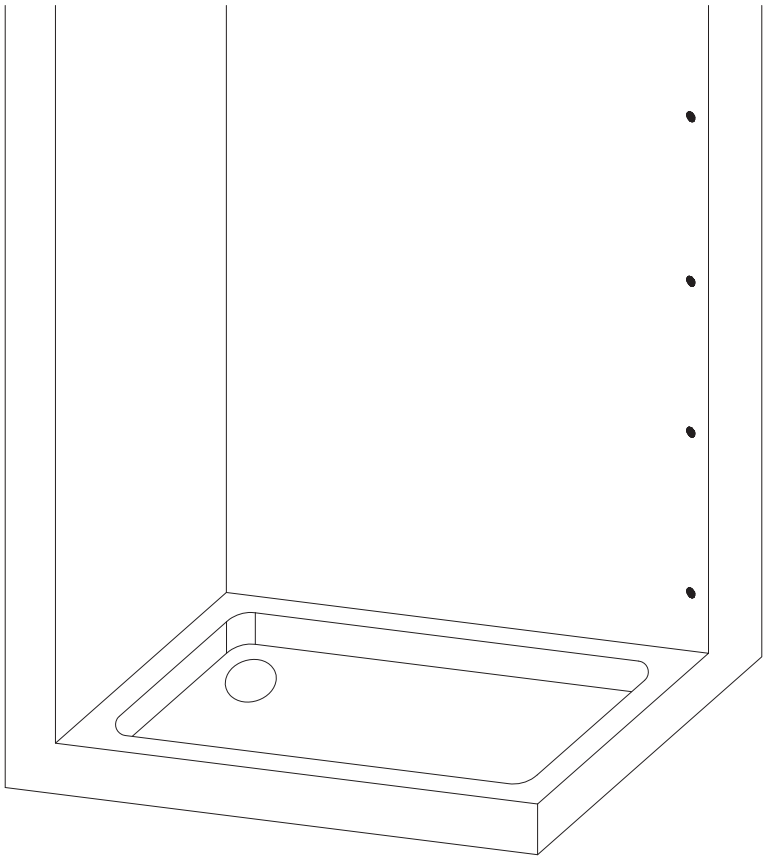







Step B3

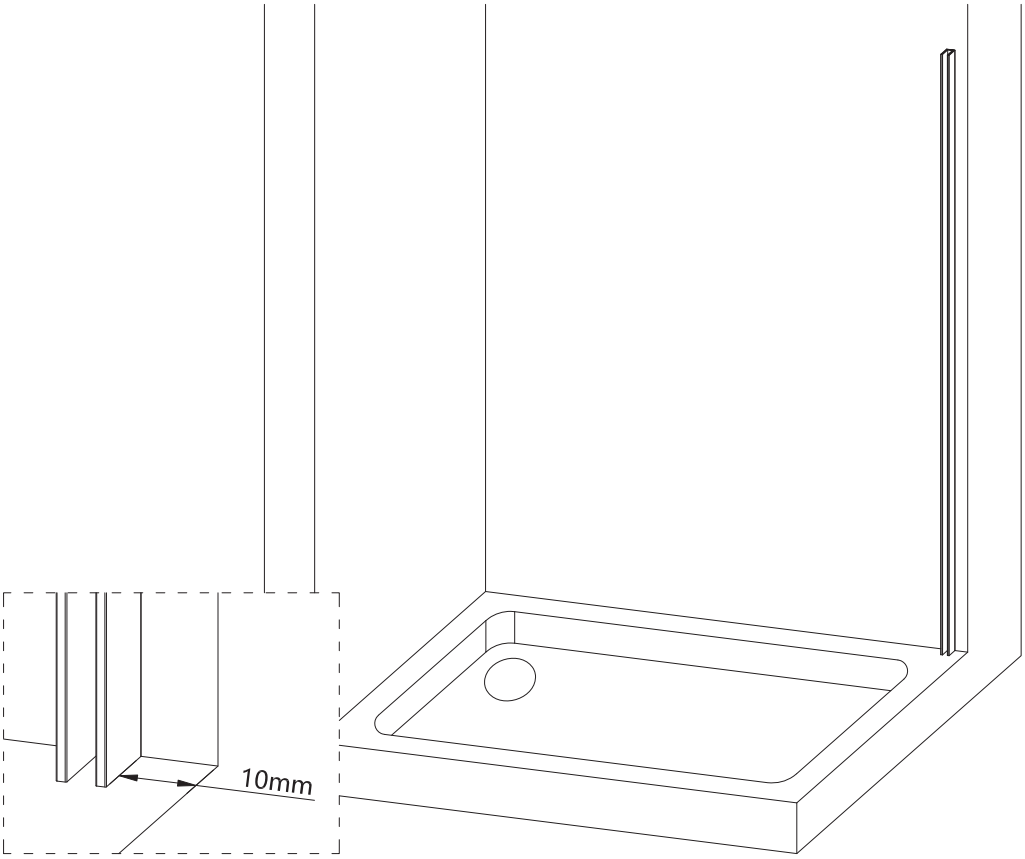

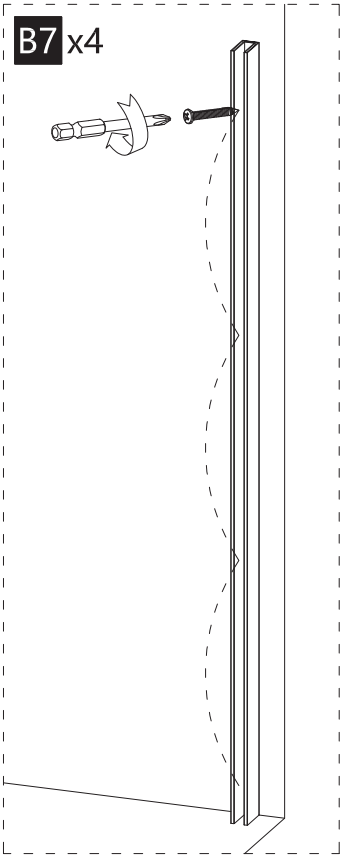

Step B4

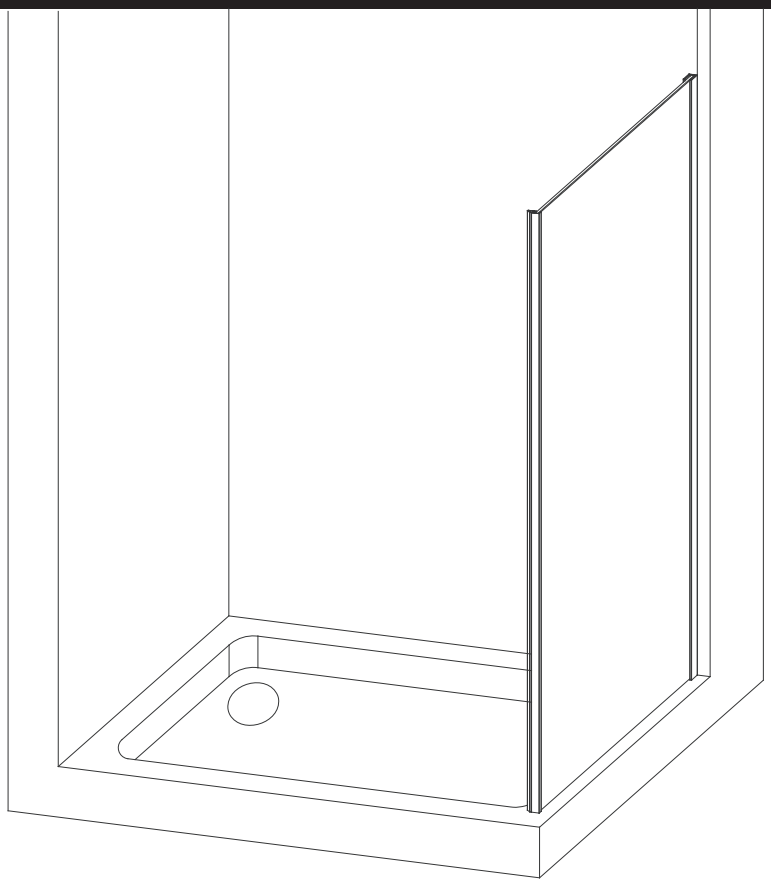





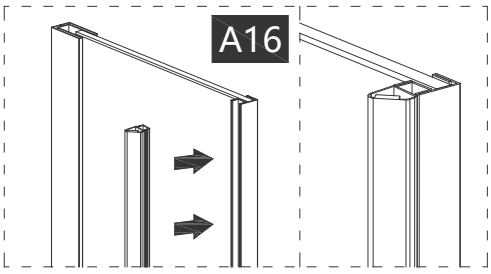

Step B5

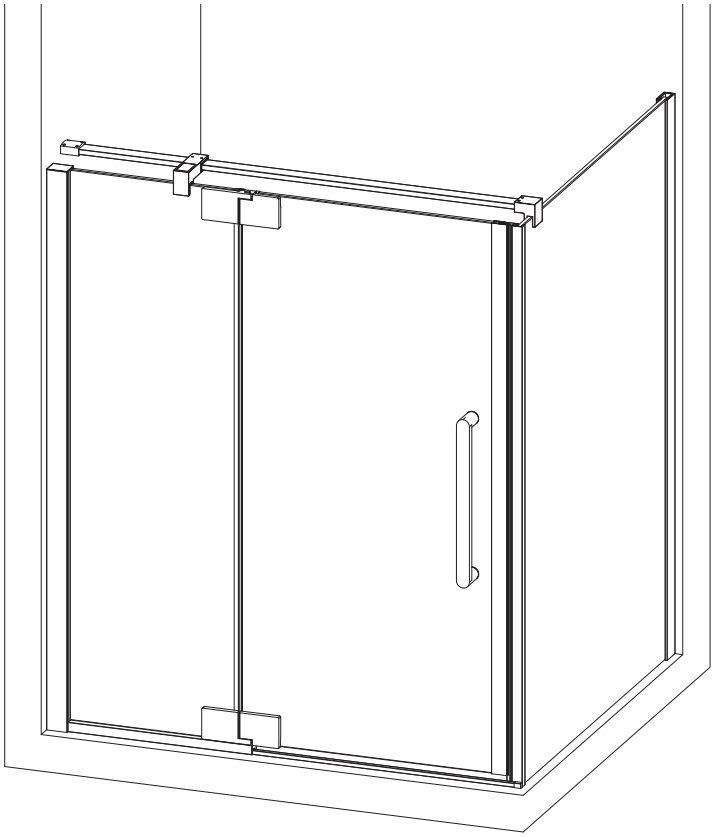







Step B6

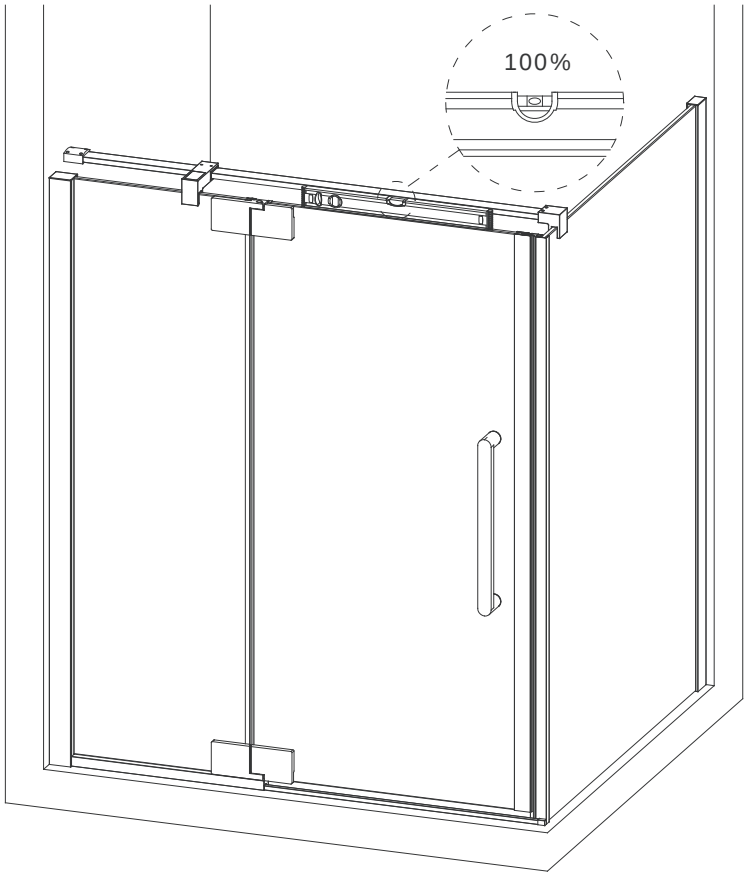









Step B7

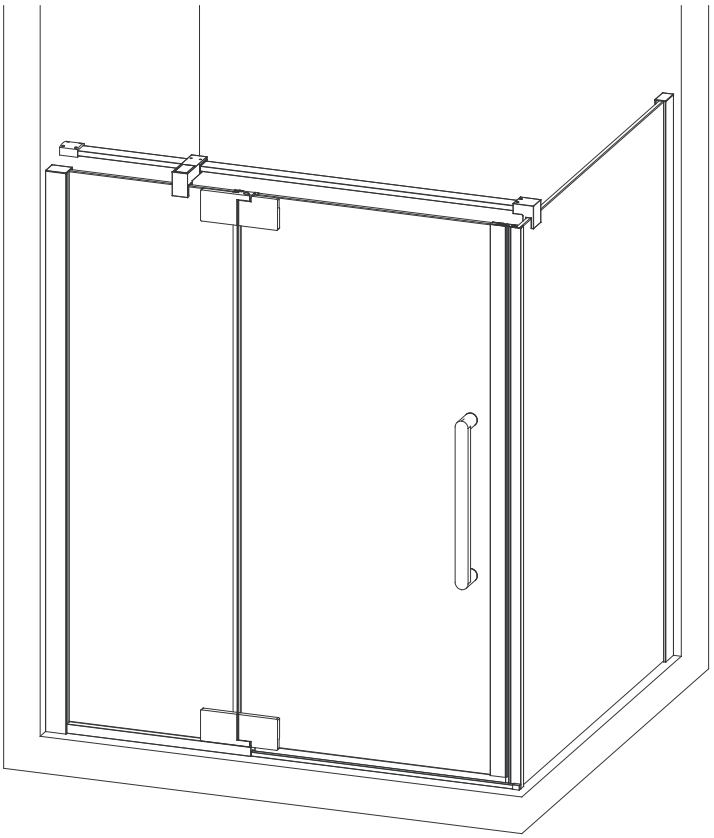







Step B8

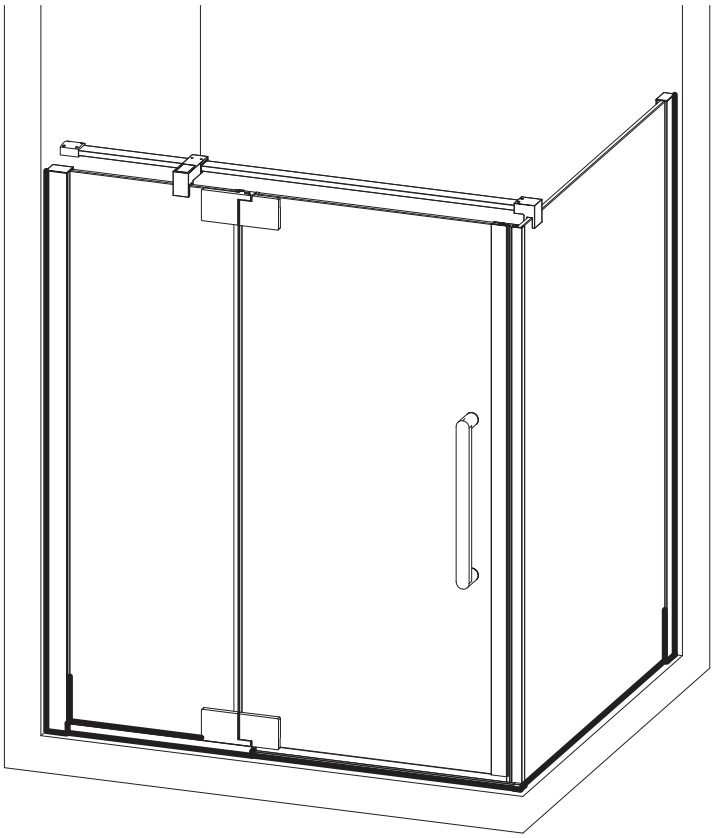

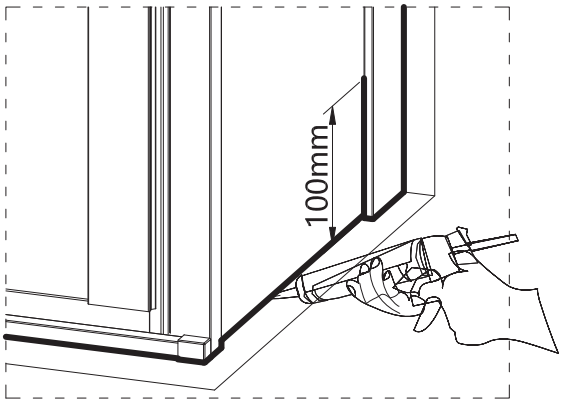

crosswater
SHOWERING

For any further information please contact Crosswater
Phone number, 0345 873 8840
Website, www.crosswater.co.uk
Email address, sales@crosswater.co.uk
The manufacturer reserves the right to make technical modifications without prior notice.