


POPOLO Mini Wall Hung Basin



RIGHT/LEFT HAND & REAR TAP HOLE MODELS

WM4825SCxx_RH WM4825SCWM_LH

INSTALLATION

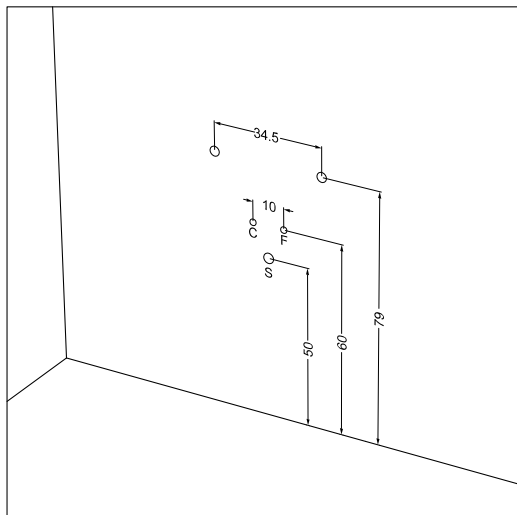


Check the contents of the pack carefully before installation. Crosswater will not be held responsible for any de-fit/re-fit costs where faulty product has been fitted.

If any fault is found with materials or workmanship, it must be reported immediately to the manufacturer. Remedial action will be taken, based on information received, on condition that: 1. Full details are supplied to the manufacturer. 2. The product has not been modified or tampered with; 3. The manufacturer is informed of any damage/shortages prior to installation. 4. The product has not been installed, or attempts have been made to install.

We do not accept responsibility for any problems that may occur through incorrect installation.

This product should only be installed by a suitably qualified Plumber/installer. Should the installation be completed by a non-qualified person any product guarantee maybe considered invalid. For a claim made under our warranty written certification of your installers qualifications can be required.

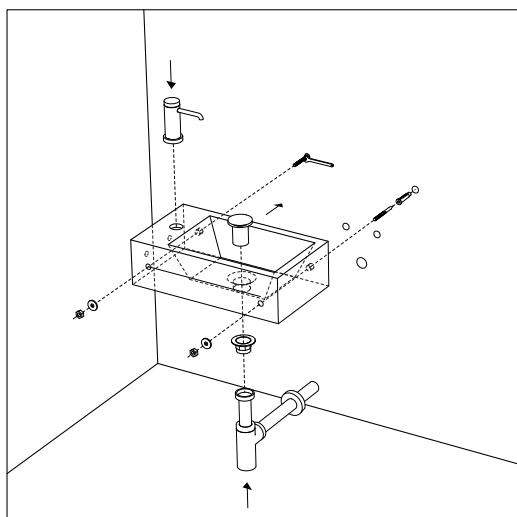


Warning! ! Please check for any hidden pipes or electrical cables before drilling holes in the floor or walls.

When using power tools always follow the manufacturer's user instructions. This installation guide details fitting to a solid wall. If your bathroom has studded/ plasterboard walls, please use appropriate plasterboard fixings. Please ensure the wall can take weight of units detailed above.

Before installing a wooden bathroom unit into a new property, extension or recently plastered room we strongly advise the building/room is completely dry, well ventilated and adequately heated.

Basin waste and tap fittings should be installed in accordance with manufacturers advices. Fittings when over tightened can create stress within the basin material which may in time cause the failure of the product. Waste fittings should be carefully bedded in silicone and the back nut hand tightened an additional quarter turn using a suitable spanner is sufficient to create the required watertight seal. Care should also be taken when fitting brassware to tap platforms in order to prevent similar stress related failures.

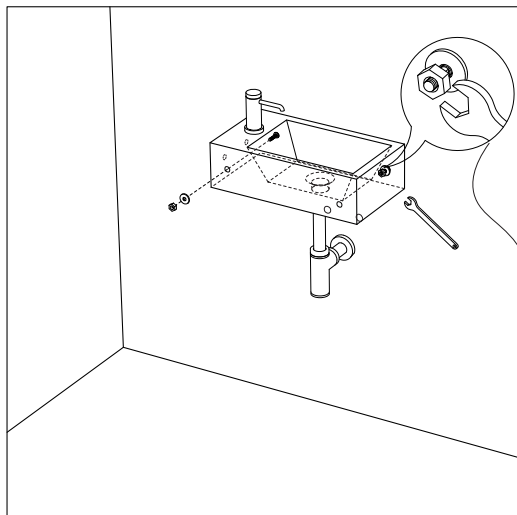

If any maintenance is required then it must be carried out by a qualified Plumber.

The manufacturer reserves the right to make technical modifications without prior notice.

Max Force 5nm

For any further information please contact
Crosswater on: 0345 873 8840
Or visit our web-site at:
www.crosswater.co.uk

The manufacturer reserves the right to make technical modifications without prior notice

POPOLO Mini Wall Hung Basin

RIGHT/LEFT HAND & REAR TAP HOLE MODELS

Cleaning Instructions

In general, always dry the surfaces using a microfibre cloth to prevent the formation of limescale stains.

Always respect the surface contact times indicated on the detergent packages and do not use mix cleaning products at the same time.

It is not recommended to use any type of strong abrasive detergent, alcohol-based or strongly acid/alkali based cleaning products such as bleach or caustic soda.

To maintain the ceramic's characteristics, regular washing with water and a non-abrasive detergent (gel, cream or spray) using a soft non-abrasive sponge, is sufficient to eliminate soap residues and prevent the formation of limescale.